


T30 Smart Plug Amatter

Enjoy easy control of your appliance from anywhere

Supports a current of up to 10 A¹



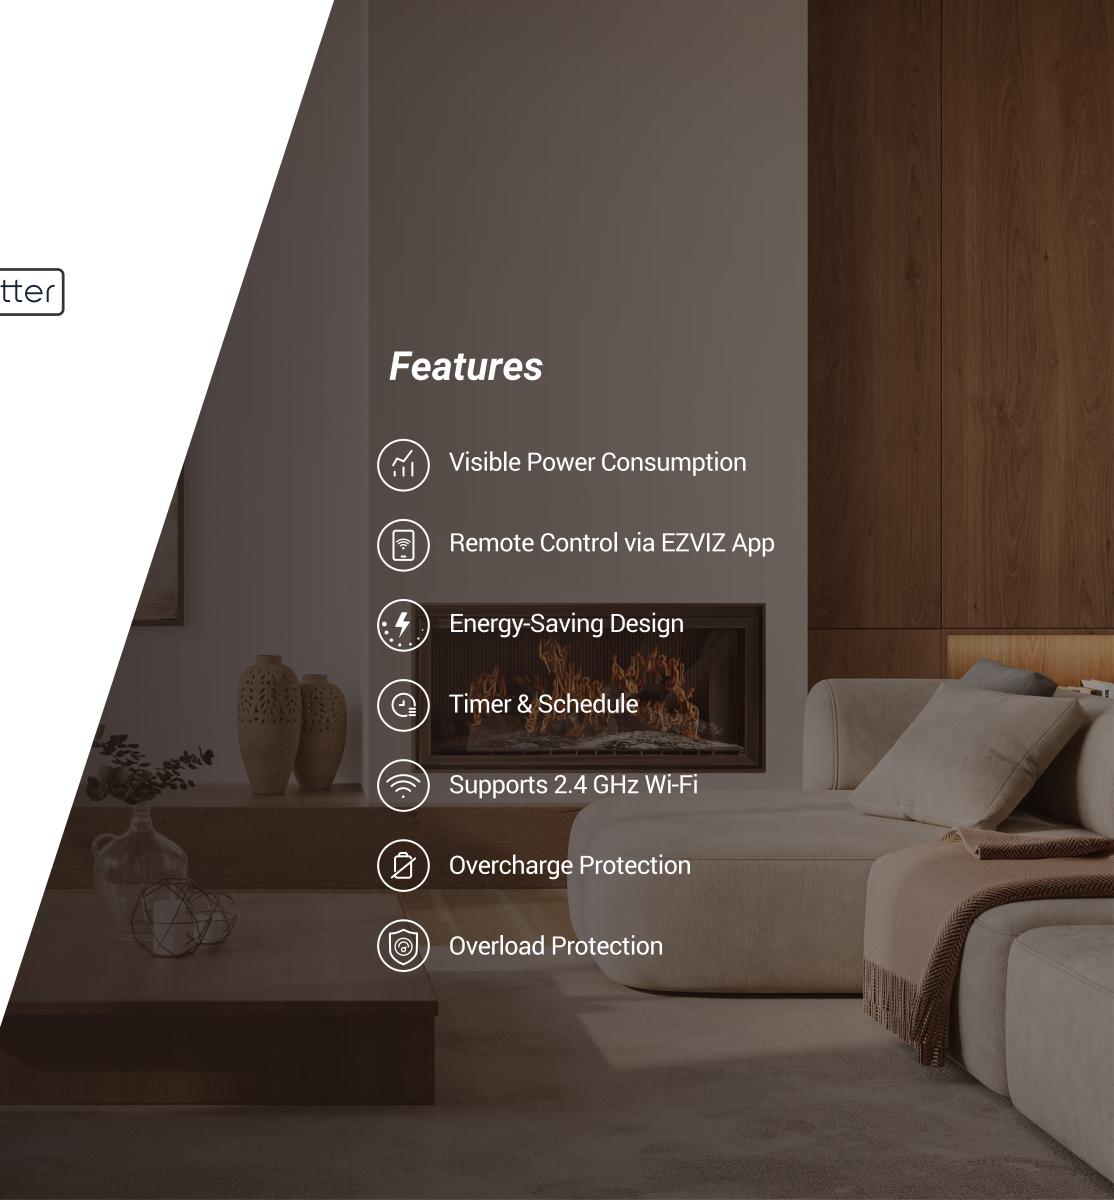

1 The T30 supports a maximum current of 10 A. To ensure safe operation, it is recommended to use appliances with a power rating of less than 2300 W.

Specifications Model CS-T30-10E-EU

Mechanical Specification

Material PC V0

Flame Retardance 750°C fire-retardance

Ingress Protection (IP) No

Electrical Specification

Power 10 A / 2300 W

Input Voltage AC 85 V \sim 265 V

Frequency 50 / 60Hz

USB Output USBL No

Max. Load (NC) N / A

Max. Load (NO) 10 A / 2300 W

Wi-Fi Standard 802.11 b/g/n, 2.4 GHz (only)

Operating Temperature $-20^{\circ}\text{C} \sim 40^{\circ}\text{C} (-4.0^{\circ}\text{F} \sim 104.0^{\circ}\text{F})$

Storage Temperature $-20^{\circ}\text{C} \sim 40^{\circ}\text{C} (-4.0^{\circ}\text{F} \sim 104.0^{\circ}\text{F})$

Max Humidity 80%

Protection

Overload ProtectionSupportsLightning ProtectionSupportsOvercurrent ProtectionSupportsFuse for Power SupplySupportsFuse for Output CircuitSupportsSurge ProtectionSupportsChild Safety Shutter ProtectionSupports

Smart Features

Third-Party Compatibility Matter

Power Counting Supports

Customized Maximum Power Limit Supports

In the box

- Smart Plug
- Regulatory Information
- Quick Start Guide

Certifications

CE (RED, LVD, ROHS, EMC) / REACH / SVHC