

COPYRIGHT © Hangzhou EZVIZ Software Co., Ltd.. ALL RIGHTS RESERVED.

Any and all information, including, among others, wordings, pictures, graphs are the properties of Hangzhou EZVIZ Software Co., Ltd. (hereinafter referred to as “EZVIZ”). This user manual (hereinafter referred to as “the Manual”) cannot be reproduced, changed, translated, or distributed, partially or wholly, by any means, without the prior written permission of EZVIZ. Unless otherwise stipulated, EZVIZ does not make any warranties, guarantees or representations, express or implied, regarding to the Manual.


### **About this Manual**

The Manual includes instructions for using and managing the product. Pictures, charts, images and all other information hereinafter are for description and explanation only. The information contained in the Manual is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version in the EZVIZ™ website (<http://www.ezvizlife.com>).

### **Revision Record**

New release – January, 2019

### **Trademarks Acknowledgement**

EZVIZ™, ™, and other EZVIZ's trademarks and logos are the properties of EZVIZ in various jurisdictions. Other trademarks and logos mentioned below are the properties of their respective owners.

### **Legal Disclaimer**

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, IS PROVIDED “AS IS”, WITH ALL FAULTS AND ERRORS, AND EZVIZ MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY. IN NO EVENT WILL EZVIZ, ITS DIRECTORS, OFFICERS, EMPLOYEES, OR AGENTS BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA OR DOCUMENTATION, IN CONNECTION WITH THE USE OF THIS PRODUCT, EVEN IF EZVIZ


HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL EZVIZ'S TOTAL LIABILITY FOR ALL DAMAGES EXCEED THE ORIGINAL PURCHASE PRICE OF THE PRODUCT.

EZVIZ DOES NOT UNDERTAKE ANY LIABILITY FOR PERSONAL INJURY OR PROPERTY DAMAGE AS THE RESULT OF PRODUCT INTERRUPTION OR SERVICE TERMINATION CAUSED BY: A) IMPROPER INSTALLATION OR USAGE OTHER THAN AS REQUESTED; B) THE PROTECTION OF NATIONAL OR PUBLIC INTERESTS; C) FORCE MAJEURE; D) YOURSELF OR THE THIRD PARTY, INCLUDING WITHOUT LIMITATION, USING ANY THIRD PARTY'S PRODUCTS, SOFTWARE, APPLICATIONS, AND AMONG OTHERS.

REGARDING TO THE PRODUCT WITH INTERNET ACCESS, THE USE OF PRODUCT SHALL BE WHOLLY AT YOUR OWN RISKS. EZVIZ SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER ATTACK, HACKER ATTACK, VIRUS INSPECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, EZVIZ WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED. SURVEILLANCE LAWS AND DATA PROTECTION LAWS VARY BY JURISDICTION. PLEASE CHECK ALL RELEVANT LAWS IN YOUR JURISDICTION BEFORE USING THIS PRODUCT IN ORDER TO ENSURE THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. EZVIZ SHALL NOT BE LIABLE IN THE EVENT THAT THIS PRODUCT IS USED WITH ILLEGITIMATE PURPOSES.

IN THE EVENT OF ANY CONFLICTS BETWEEN THE ABOVE AND THE APPLICABLE LAW, THE LATTER PREVAILS.

# 包裝內容




Wi-Fi 攝影機



鑽孔模板



螺絲組



防水套件



電源變壓器




法規資訊



快速入門指南

# 基本元件

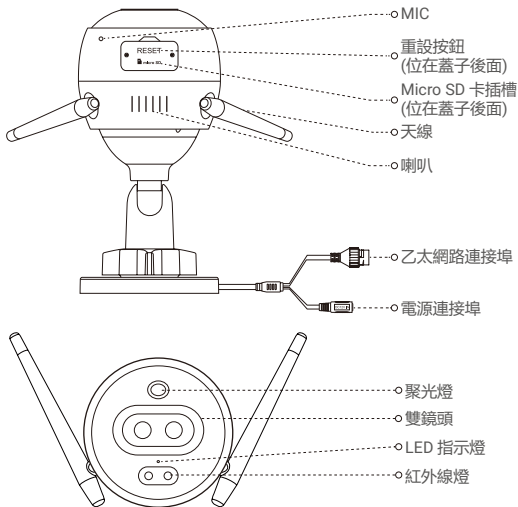

## 名稱

### LED 指示燈

## 說明

- 持續亮紅燈：攝影機啟動中。
- 緩慢閃紅燈：Wi-Fi 連線失敗。
- 快速閃紅燈：攝影機異常 (例如 Micro SD 卡錯誤)。
- 持續亮藍燈：正在用 EZVIZ 應用程式觀看影片。
- 緩慢閃藍燈：攝影機運作正常。
- 快速閃藍燈：攝影機可進行 Wi-Fi 連線。

# 取得 EZVIZ 應用程式

1. 使用 2.4GHz 網路將行動電話連線至 Wi-Fi。
2. 在 App Store 或 Google Play <sup>(TM)</sup> 中搜尋「EZVIZ」。
3. 下載並安裝 EZVIZ 應用程式。
4. 啟動應用程式，註冊 EZVIZ 使用者帳號。

## 設定

### 按照步驟設定攝影機：


1. 將您的攝影機電源開啟。
2. 登入您的 EZVIZ 應用程式使用者帳號。
3. 將您的攝影機連線至網際網路。
4. 將您的攝影機新增到您的 EZVIZ 帳號中。

### 如何設定您的 Wi-Fi 攝影機？

#### 1 開啟電源

步驟：

1. 連接電源變壓器纜線至攝影機的電源連接埠。
2. 將電源變壓器插入電源插座。

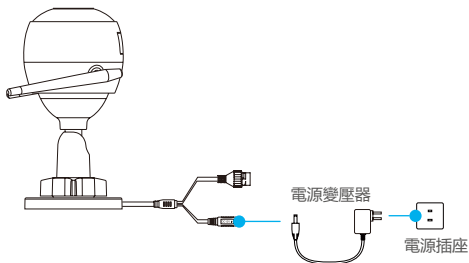

 LED 轉變成快速閃藍燈，表示攝影機已開啟電源並可進行 Wi-Fi 設定。


## 2 連線至網際網路

- 無線連接：將攝影機連線至 Wi-Fi。請參閱 **選項 1**。
- 有線連接：將攝影機連接至路由器。請參閱 **選項 2**。


### 選項 1：使用 EZVIZ 應用程式設定 Wi-Fi。

步驟：

1. 使用 EZVIZ 應用程式登入帳號。
2. 在主畫面中，點選右上角的「+」以進入掃描 QR 代碼介面。



3. 掃描快速入門指南封面或相機機身上的 QR 碼。

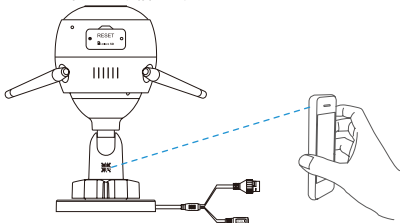

4. 依照 EZVIZ 應用程式精靈完成 Wi-Fi 設定。

請選擇將攝影機連線至與您的行動電話所連接相同的 Wi-Fi。


按住重設按鈕 5 秒鐘即可重新啟動並將所有參數設定為預設值。遇到下列任何情況時，按住重設按鈕 5 秒鐘：

- 攝影機無法連線至 Wi-Fi 網路。
- 您想要更改成其他 Wi-Fi 網路。


## 選項 2：將您的 Wi-Fi 攝影機連接至路由器。

### 步驟：


1. 使用乙太網路纜線將攝影機連接到路由器的 LAN 連接埠。

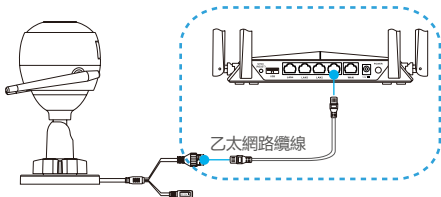

2. 使用 EZVIZ 應用程式登入帳號。
3. 在主畫面中，點選右上角的「+」以進入掃描 QR 代碼介面。



4. 掃描快速入門指南封面或相機機身上的 QR 碼。

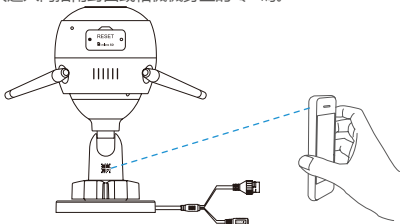


5. 依照精靈步驟將攝影機新增到 EZVIZ 應用程式。

# 安裝 (選擇性)

## 1 安裝 Micro SD 卡 (選擇性)

1. 移除攝影機上的蓋子。
2. 將 micro SD 卡 (另售) 插入卡片插槽，如下圖所示。
3. 裝回蓋子。

**i** 安裝 micro SD 卡之後，您應該在使用前於 EZVIZ 應用程式中將卡片初始化。

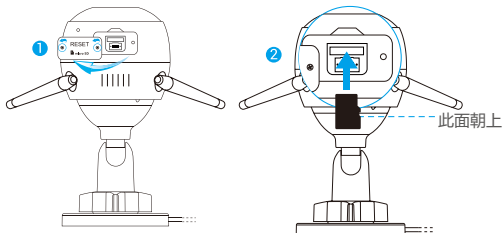

4. 在 EZVIZ 應用程式中，點擊 Device Settings (裝置設定) 介面中的 Storage Status (儲存裝置狀態) 查看 SD 卡狀態。
5. 如果記憶卡狀態顯示為 Uninitialized (未初始化)，請點擊以將記憶卡初始化。


**i** 此狀態會更改成 Normal (正常)，並可儲存影片。



## 2 安裝攝影機

攝影機可以安裝在牆上或天花板上。這裡以牆壁安裝為例。


- i 建議的安裝高度：3 公尺 (10 英尺)。
  - 請確定牆壁/天花板的強度足以承受三倍的攝影機重量。
  - 避免將攝影機放置光線充足並直接照射攝影機鏡頭的區域。
- 將鑽孔模板放在已選擇安裝攝影機的表面上。
  - (僅限水泥牆/天花板) 依據模板鑽出螺絲孔，再插入三個膨脹螺絲。
  - 依據模板使用三顆金屬螺絲固定攝影機。

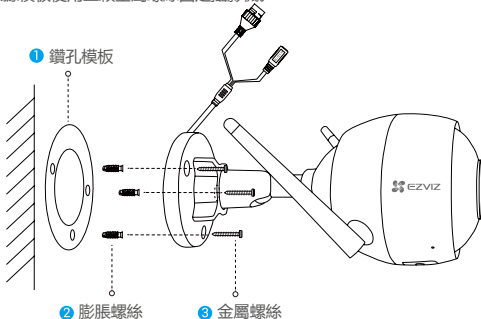

- i 必要時，請在安裝底座後撕掉鑽孔模板。

### 3 調整監視角度

- 鬆開調整螺絲。
- 調整監視角度以取得最佳攝影機畫面。
- 鎖緊調整螺絲。



- i 確認 micro SD 卡插槽面朝下方。
- i 如需詳細資訊，請造訪 [www.ezvizlife.com](http://www.ezvizlife.com)。