



C3S

Be There for You, Rain or Shine

A Wi-Fi bullet camera offering Full HD 1080p video for protection rain or shine (Wi-Fi + PoE configuration optional).

Key Features

Full HD

1080P



Supports 2.4GHz Wi-Fi (IEEE 802.11b/g/n)



True Day/Night camera with auto-switching. Infrared night vision up to 30 meters.



IP66 Dustproof and Waterproof



Supports MicroSD card slot, up to 128GB




Secure cloud recording* (optional)



Quicker. Faster. Better.

Quicker processing, faster counting speed and better image processing.

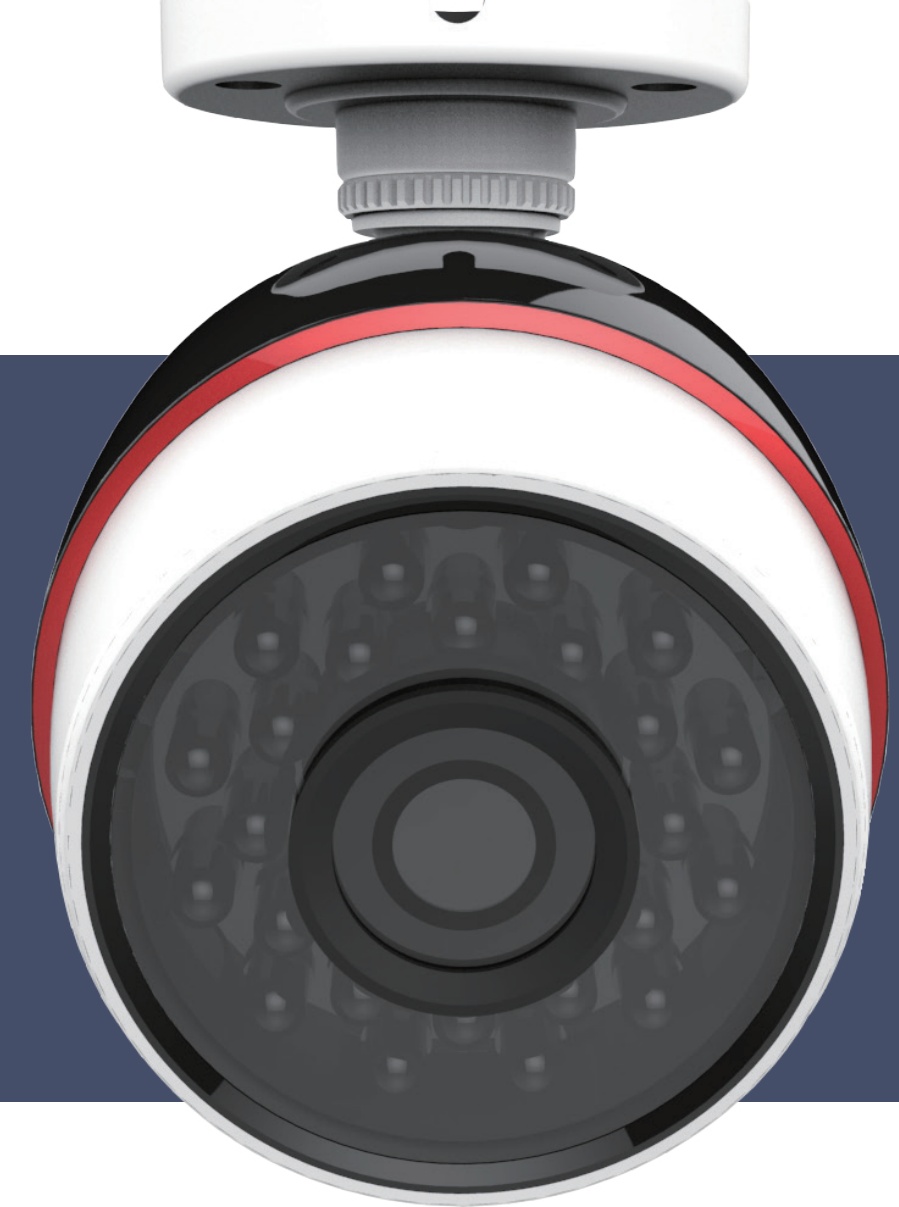

True-to-Life video

See video the way your eyes see it with 120dB WDR, which balances colors and light to match real life.



HDR Off



HDR On

Night vision

When the sun goes down, the C3S's night vision goes on for clear Full HD video in the dark up to 30 meters.



See every detail

The high-definition, wide-angle lens not only provides more detail but also more coverage.




Security for all seasons

With an IP66-rated weatherproof design, the C3S is a reliable and durable guard that can protect you in all types of weather: rain, sunshine or even snow.



Instant alerts (manual activation required)

The C3S watches for movement. It will take a picture and send alerts to your smartphone when it detects motions.

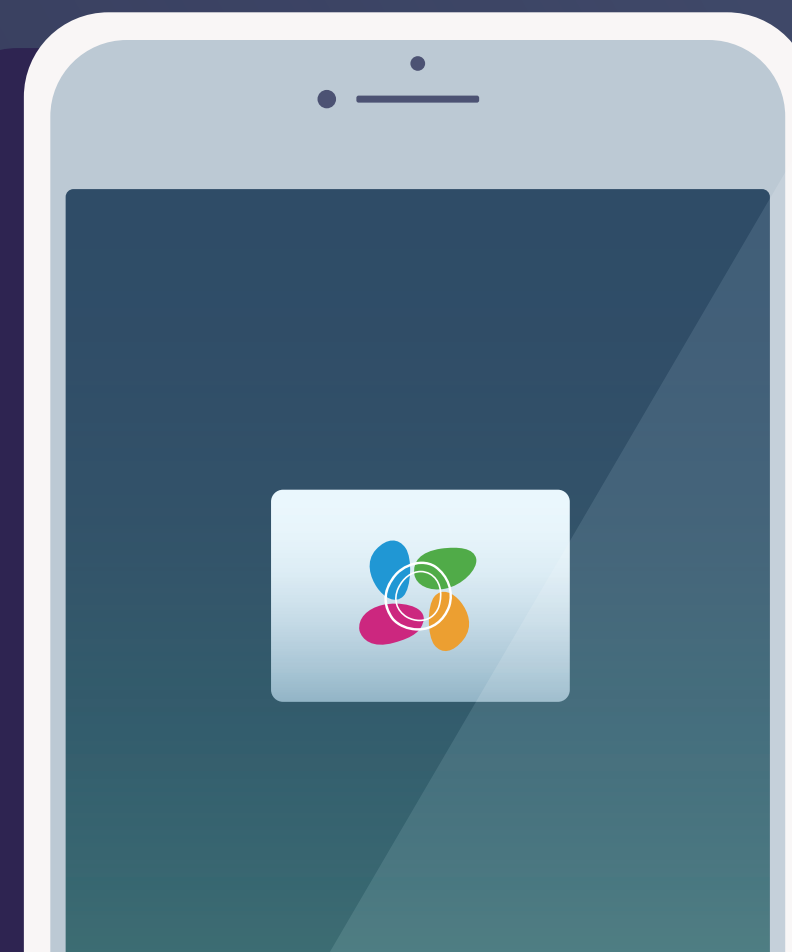

Specifications Model CS-CV210-A0-52(W)(E)FR(4mm)

Camera

Image Sensor	1/2.7" Progressive Scan CMOS
Minimum Illumination	0.02 lux @(F2.0, AGC ON), 0 lux with IR
Shutter	Self-adaptive shutter
Lens	4mm F2.0 90°(Horizontal), 107.5° (Diagonal)
Lens Mount	M12
Day & Night	IR-cut filter
DNR	3D DNR
WDR	Max 120db WDR

Compression

Video Compression	H.264
H.264 Type	Main Profile
Video Bit Rate	HD, Balanced and Smooth. Adaptive bit rate.

Image

Max. Resolution	1920×1080
Image Settings	Brightness, contrast, saturation, etc. (configurable via EZVIZ Studio)
BLC	Support

Network

Storage	Supports MicroSD card (max. 128GB)
Smart Alarm	Motion Detection
Wi-Fi Pairing	SmartConfig (Wi-Fi One-Key Configuration)
Protocol	EZVIZ Cloud proprietary protocol
Interface Protocol	EZVIZ Cloud proprietary protocol
General Features	Anti-Flicker, Dual-Stream, Heartbeat Messages, Mirror Image, Password Protection, Watermark
Communication Interface	1 RJ45 10M/100M self-adaptive Ethernet port
Minimum Network Requirements	2Mbps

Wireless Specifications (for Wi-Fi-supported devices)

Standard	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4 GHz ~ 2.4835 GHz
Channel Bandwidth	Supports 20MHz
Security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK, WPS
Transmission Rate	11b: 11Mbps, 11g: 54Mbps, 11n: 135Mbps

General

Power Supply	DC 12V±10% Or PoE (Power over Ethernet) (Optional)
Power Consumption	5W Max (ICR 7W)
IP Grade	IP66
IR Range	Up to 98.4ft (30 meters)
Product Dimensions	176.3mm × 83.5mm × 69.8mm
Packaging Dimensions	252mm x 92mm x 90mm
Weight	0.886 lb (331g)

Package Contents:

- C3S X 1
- Power Adapter with 1.5 Meters Power Cable (optional) X 1
- Mounting Template X 1
- Screw Kit X 1
- Quick Start Guide X 1

Requirements

- Operating Conditions: -30°C ~ 60°C, Humidity 95% or less (non-condensing)

Certificates

FCC/UL/IC/NOM/CE/RoHS/WEEE/REACH

Specifications are subject to change without notice. EZVIZ is a registered trademark of Hangzhou EZVIZ Network Co., Ltd.
Other brands and product names are trademarks or registered trademarks of their respective holders.

<https://www.ezvizlife.com/>