

COPYRIGHT © Hangzhou EZVIZ Software Co., Ltd.. ALL RIGHTS RESERVED.

Any and all information, including, among others, wordings, pictures, graphs are the properties of Hangzhou EZVIZ Software Co., Ltd. (hereinafter referred to as "EZVIZ"). This user manual (hereinafter referred to as "the Manual") cannot be reproduced, changed, translated, or distributed, partially or wholly, by any means, without the prior written permission of EZVIZ. Unless otherwise stipulated, EZVIZ does not make any warranties, guarantees or representations, express or implied, regarding to the Manual.



About this Manual

The Manual includes instructions for using and managing the product. Pictures, charts, images and all other information hereinafter are for description and explanation only. The information contained in the Manual is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version in the **EZVIZ™** website (<http://www.ezvizlife.com>).

Revision Record

New release – January, 2019

Trademarks Acknowledgement

 **EZVIZ™**,  **™**, and other EZVIZ's trademarks and logos are the properties of EZVIZ in various jurisdictions. Other trademarks and logos mentioned below are the properties of their respective owners.

Legal Disclaimer

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, IS PROVIDED "AS IS", WITH ALL FAULTS AND ERRORS, AND EZVIZ MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY. IN NO EVENT WILL EZVIZ, ITS DIRECTORS, OFFICERS, EMPLOYEES, OR AGENTS BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA OR DOCUMENTATION, IN CONNECTION WITH THE USE OF THIS PRODUCT, EVEN IF EZVIZ HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL EZVIZ'S TOTAL LIABILITY FOR ALL DAMAGES EXCEED THE ORIGINAL PURCHASE PRICE OF THE PRODUCT.

EZVIZ DOES NOT UNDERTAKE ANY LIABILITY FOR PERSONAL INJURY OR PROPERTY DAMAGE AS THE RESULT OF PRODUCT INTERRUPTION OR SERVICE TERMINATION CAUSED BY: A) IMPROPER INSTALLATION OR USAGE OTHER THAN AS REQUESTED; B) THE PROTECTION OF NATIONAL OR PUBLIC INTERESTS; C) FORCE MAJEURE; D) YOURSELF OR THE THIRD PARTY, INCLUDING WITHOUT LIMITATION, USING ANY THIRD PARTY'S PRODUCTS, SOFTWARE, APPLICATIONS, AND AMONG OTHERS.

REGARDING TO THE PRODUCT WITH INTERNET ACCESS, THE USE OF PRODUCT SHALL BE WHOLLY AT YOUR OWN RISKS. EZVIZ SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER ATTACK, HACKER ATTACK, VIRUS INSPECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, EZVIZ WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED. SURVEILLANCE LAWS AND DATA PROTECTION LAWS VARY BY JURISDICTION. PLEASE CHECK ALL RELEVANT LAWS IN YOUR JURISDICTION BEFORE USING THIS PRODUCT IN ORDER TO ENSURE THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. EZVIZ SHALL NOT BE LIABLE IN THE EVENT THAT THIS PRODUCT IS USED WITH ILLEGITIMATE PURPOSES.

IN THE EVENT OF ANY CONFLICTS BETWEEN THE ABOVE AND THE APPLICABLE LAW, THE LATTER PREVAILS.

Obsah balení



Kamera (1x)



Vrtací šablona (1x)




Sada šroubů (1x)



Stručná příručka (1x)

Základy

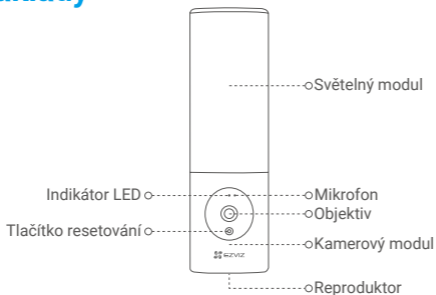


Název	Popis
Indikátor LED	<ul style="list-style-type: none">Nepřerušovaná červená: Kamera se spouští.Pomalou blikající červená: Připojení k síti Wi-Fi se nezdařilo.Rychle blikající červená: Výjimka kamery (např. chyba paměťové karty).Nepřerušovaná modrá: Živé sledování videa v aplikaci EZVIZ.Pomalou blikající modrá: Kamera je v provozu a funguje správně.Rychle blikající modrá: Kamera je připravena k připojení k síti Wi-Fi.
Objektiv	Natočení objektivu lze upravit o 15 stupňů dolů.
Kamerový modul	Kamerový modul lze natočit o 10 stupňů doleva a doprava.
Tlačítko resetování	Podržím po dobu 4 sekund kameru restartujete a obnovíte výchozí nastavení všech parametrů.

Montáž

- Doporučená montážní výška: 1,8–2,2 m nad zemí.
- Kamera má vestavěnou paměťovou kartu k ukládání videa. Není třeba instalovat další kartu SD.


1. Vypněte elektřinu na jističi.



- Pokud nevíte, kde se jistič nachází nebo jak vypnout napájení, poraďte se s kvalifikovaným elektrikářem.
- Při každé instalační práci jistič vypněte.


2. Oddělte montážní základnu od kamery.

Odšroubujte šroub základny šroubovákem (není součástí balení) a sejměte montážní základnu z kamery.




3. Namontujte montážní základnu.

- Na místo vybrané k montáži základny položte vrtací šablonu.
- **(Pouze pro betonové stěny)** Vyrtejte podle šablony otvory a vložte do nich hmoždinky.
- Protáhněte vodiče ze zdi skrz otvory vrtací šablony a pryž montážní základny.
- Montážní základnu připevňte šrouby.

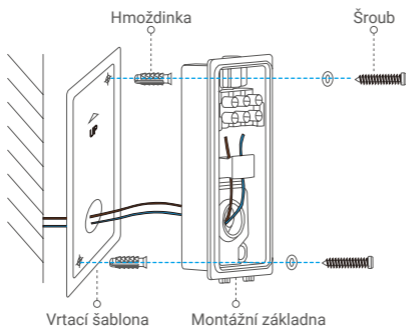


4. Zapojte vodiče.

- Postupně zapojte neutrální vodič (N), a proudový vodič (L).
- Zajistěte je šroubovákem.




5. Nasadte kameru na montážní základnu.

- Připněte dolní část montážní základny ke kameře.
- Přitiskněte montážní základnu a kameru k sobě.
- Utáhněte šroub základny umístěný na horní části kamery.




6. Seřídte úhel kamerového modulu.

Horizontální a vertikální úhel kamerového modulu můžete podle potřeby upravit.




7. Obnovte na jističi napájení.



8. Zkontrolujte, že je kamera připojena k napájení.

Po obnovení napájení bude kamera připravena k nastavení, pokud světlo svítí a indikátor LED na přední straně kamery rychle bliká modře.



Instalace

1. Získání aplikace EZVIZ


- Připojte mobilní telefon k síti Wi-Fi.
- Zadáním textu „EZVIZ“ vyhledejte v obchodech App Store nebo Google Play™ aplikaci EZVIZ. Stáhněte ji a nainstalujte.
- Spusťte aplikaci a zaregistrujte svůj uživatelský účet EZVIZ.

2. Přidání kamery do aplikace EZVIZ

- Přihlaste se do svého účtu pomocí aplikace EZVIZ.
Klepnutím na tlačítko „+“ v pravém horním rohu domovské obrazovky přejděte do okna skenování kódu QR.



- Naskenujte kód QR na obálce stručné příručky nebo na těle kamery.



- Postupujte podle průvodce aplikace EZVIZ a dokončete konfiguraci sítě Wi-Fi.

- i** Chcete-li změnit síť Wi-Fi kamery, stiskněte a podržte tlačítko resetování po dobu 4 s a výše uvedené kroky zopakujte.

VYSTAVENÍ RADIOFREKVENČNÍMU ZÁŘENÍ

Frekvenční pásma a jmenovité limity přenášeného výkonu (vyzařovaného a vedeného) jsou ve vztahu k tomuto rádiovému zařízení následující:

Pásmo	Síť Wi-Fi 2,4 GHz
Frekvence	Od 2,4 GHz do 2,4835 GHz
Přenosový výkon (EIRP)	100 mW

- i** Podrobné informace naleznete na webu www.ezviz.eu.