

DP1C

Wire-Free Smart Door Viewer

Two-in-one Video Doorbell and Door Viewer.

Now you can easily see and talk to visitors through an indoor monitor and on your mobile phone.



PIR Motion Detection



720p Video



4.3-Inch Color Screen



View from Anywhere



Two-Way Talk



High-Endurance Zinc Alloy body



4600 mAh Rechargeable Battery



Built-in Chime



Night Vision up to 3 m (10 ft.)




See who's out there on a color screen.

Equipped with a 4.3-inch color screen for the interior side of your front door, the DP1C Door Viewer shows you who's out there.




Instant alerts for 24/7 protection.

Featuring smart motion detection, the exterior camera captures images and sends real-time alerts to you when a visitor is at the door.

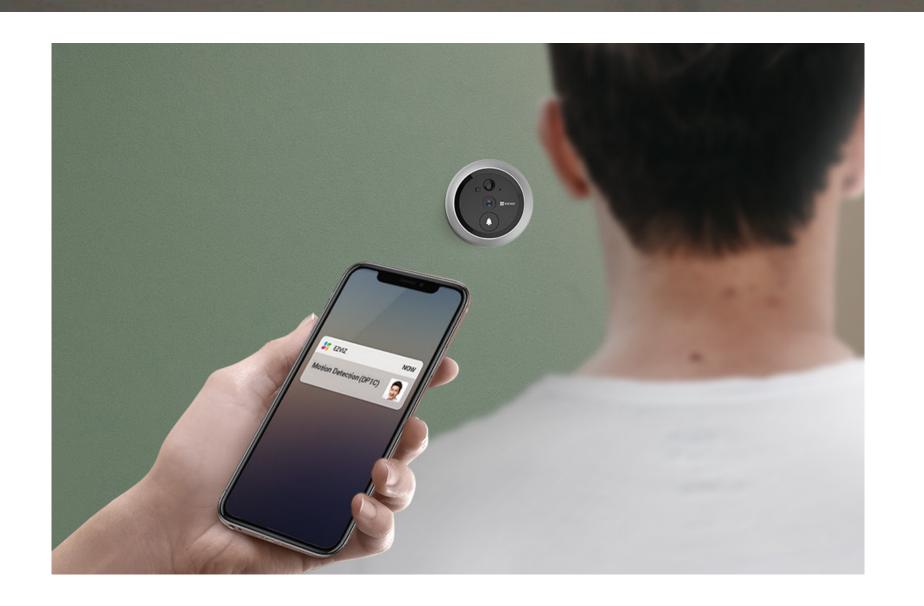

See and speak with visitors when you're away.

Thanks to built-in ringtones, the DP1C alerts you to visitors and provides real-time video on the screen. If you are away, you can still see and speak with your visitors using your mobile phone.

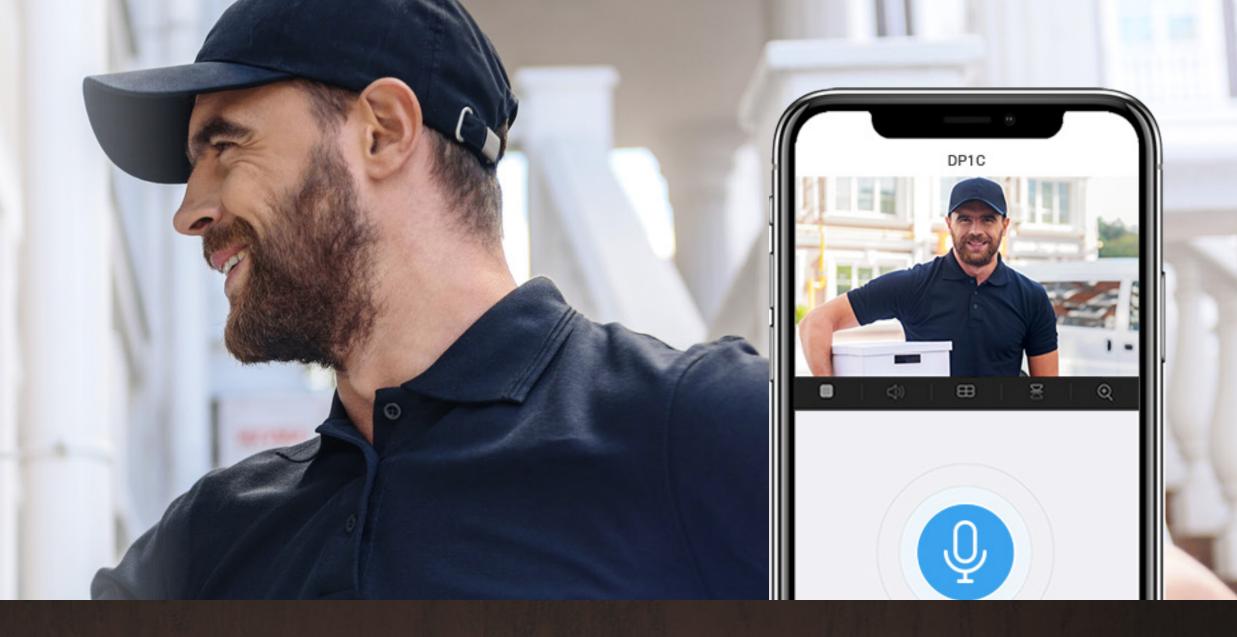


Brilliant vision, day and night.

See more and see clearer with its 104° wide-angle lens.
Rendering sharp night vision of objects up to 3 meters away, the DP1C ensures your peace of mind all day and all night.
It is also smart enough to automatically shift between day and night modes.




Sturdy and secure zinc alloy body.

Made of zinc alloy, the device fits seamlessly onto your door. The exterior camera is tamper -proof and privacy-guaranteed, making it impossible for bad actors to peep into your house through the camera.

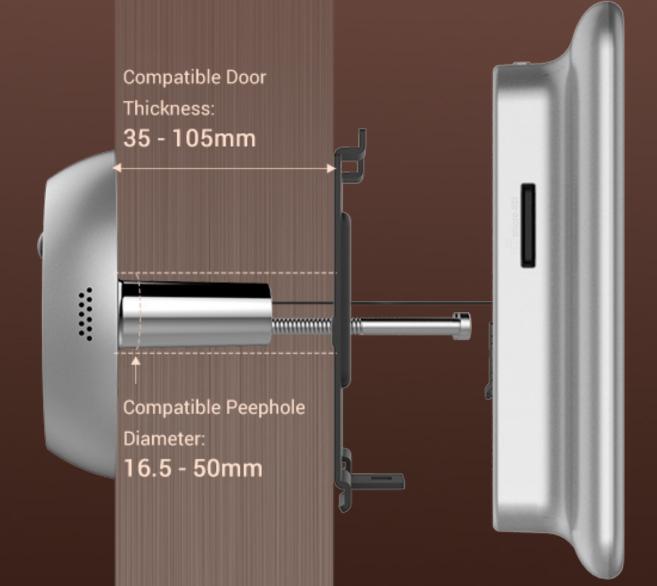

Long-lasting protection.

Equipped with a built-in 4600 mAh rechargeable lithium battery, the DP1C delivers long battery life with minimal power consumption.

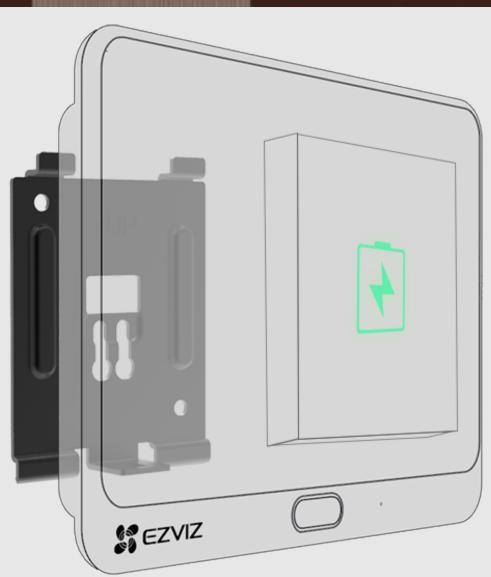

We protect your data and privacy.

Protecting your data and privacy is our highest priority. Data transmission between the device and the EZVIZ Cloud is encrypted from end to end. Only you have the keys to decrypt your data.



AES 128-bit encryption



TLS encryption protocol



Multiple authentication steps

Specifications cs-dp1c-a0-4a1wpfbsr

Installation

Compatible Peephole Diameter $16.5 \sim 50 \text{ mm} (0.65 \sim 1.97 \text{ inch})$ Compatible Door Thickness $35 \sim 105 \text{ mm} (1.38 \sim 4.13 \text{ inch})$

Camera

Sensor 1/3" Progressive Scan CMOS

Lens 2.2mm @ F2.4, view angle: 104° (horizontal / vertical), 136°

(diagonal)

Day / Night Switch ICR infrared filter

IR Distance Max. 3 m (10ft.)

Max. Resolution 720P / 1MP

PIR Detection

Angle 100°

Distance Max. 3 m (10ft.)

Sensitivity Adjustable

Interface

Storage Interface MicroSD card slot supports up to 128 GB

Audio Input Built-in highly sensitive microphone

Audio Output Built-in high-power speaker

Buttons Doorbell button, power button, Screen wake up button

Network

Face Detection Supports

Intelligence Alarm PIR person detection

Protocol EZVIZ cloud proprietary protocol

Video Intercom

Local and remote video intercom

General Function Cloud video encryption and image encryption

Wireless

Wi-Fi Standard IEEE802. 11b/g/n

Frequency Range 2.4 GHz ~ 2.4835 GHz

Channel Bandwidth Supports 20 MHz

Security 64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK

Transmission Rate 11b: 11 Mbps, 11g: 54 Mbps, 11n: 144 Mbps

General

Screen 4.3" Color Screen

Color Silver

Operating Conditions -10°C to 45°C (14°F to 113 °F), Humidity 95% or less

(non-condensing)

Power Supply DC 5V (±10%)

Power Consumption Max 2.2W

Dimension Screen and base: 115.5 x 85.5 x 24.5 mm (4.55 x 3.37

x 0.96 inch)

Camera: 71 x 71 x 48.3 mm (2.80 x 2.80 x 1.90 inch)

Packaging Dimensions 165 x 107 x 80 mm (6.50 x 4.21 x 3.15 inch)

Weight 343 g (12.1 oz)

In the box:

- Camera
- Panel
- Mounting Base
- Power Adapter
- 1 Meter (3.3 Feet) Power Cable
- Screw × 6
- Quick Start Guide

Certifications:

UL / FCC / CE / WEEE / REACH / RoHS