About this Manual

The Manual includes instructions for using and managing the product. Pictures, charts, images and all other information hereinafter are for description and explanation only. The information contained in the Manual is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version in the ΞΖVΙΖ ™ website (http://www.ezvizlife.com).

Revision Record

New release – January, 2021

Trademarks Acknowledgement

ΞΖVΙΖ ™, 🐾 ™, and other EZVIZ's trademarks and logos are the properties of EZVIZ in various jurisdictions. Other trademarks and logos mentioned below are the properties of their respective owners.

Legal Disclaimer

Table of Contents

Overview

1. Package Contents

Open/Close Sensor

Double-sided Tape

Regulatory Information

Quick Start Guide

2. Basics

RESET Button

Detector

Magnet
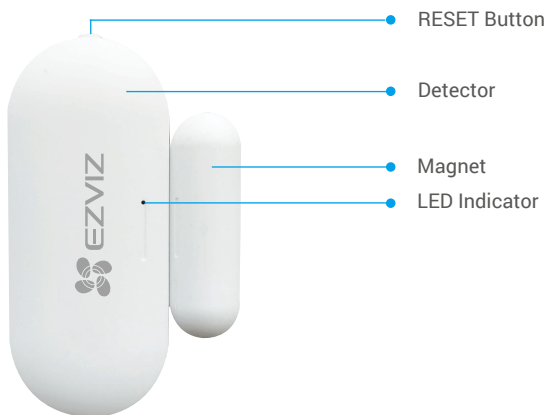
LED Indicator

Name	Description
RESET Button	Press and hold the button for over 5s to make the sensor enter device adding mode.
LED Indicator	• Fast-flashing Blue: Sensor enters device adding mode. • Fast-flashing Blue Once: Door opening/closing signals triggered.

Get the EZVIZ App

1. Connect your mobile phone to Wi-Fi (suggested).
2. Download and install the EZVIZ app by searching for "EZVIZ" in the App Store or Google Play™.
3. Launch the app and register an EZVIZ user account.

	EZVIZ App
Download on the **App Store**	**GET IT ON** **Google Play**

ⓘ If you have already used the app, please make sure that it is the latest version. To find out if an update is available, go to the app store and search for "EZVIZ".

Preparations

1. Detach Cover

Detach the cover of the sensor at the detaching groove.

Detaching Groove

Cover
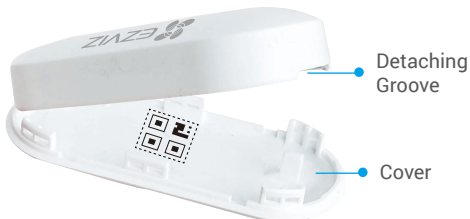
2. Remove Insulation Strip

Remove the battery insulation strip as instructed in the figure below.

Battery

Insulation Strip
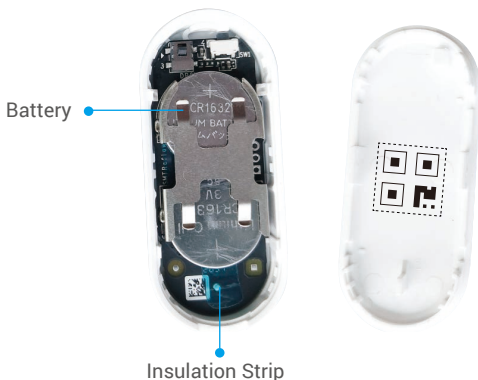
ⓘ • When the battery level is low, the low battery notification will be pushed to the EZVIZ app to remind you to replace batteries.
• If you need to replace batteries, please purchase two CR1632 batteries.
• When replacing batteries, please insert with the positive side facing up.
• Keep your hands dry and clean when touching the circuit board.

Add Device

ℹ The open/close sensor should be used along with EZVIZ Smart Gateway (afterinafter referred to as "gateway"). Please add the gateway to the EZVIZ Cloud, and then add the sensor to the gateway by the following two methods.

1. Method One: Add by Scanning QR Code

1. Log in to your account through EZVIZ app, tap the device adding icon and then the QR code scanning interface will be displayed.

2. Scan the QR code on the inner side of the cover or on the user manual, and then add the sensor to the gateway.

3. Place the sensor as displayed in the figure below.

4. Place the cover back.

2. Method Two: Add by the Gateway

ℹ When adding sensor by the gateway, place the sensor as close to the gateway as possible.

1. Make the gateway enter device adding mode as instructed by the user manual of the gateway

2. Press and hold the RESET button for over 5 seconds until the indicator on the sensor flashes rapidly blue, and then the sensor will enter adding mode.

3. The sensor will be added to the gateway automatically.

Installation

ℹ️ • The sensor must be placed away from magnetic field, and when doors or windows are closed, the distance between the sensor and the magnet should be less than 20mm.
  • Before sticking the sensor, clean the dust on the surface of the door or window first. Do not stick the sensor on limewashed walls.
  • The installation instruction grooves on the sensor and magnet should be placed together and aligned (as displayed in the figure below).
  • The installation height does not exceed 1.8m.
  • The working temperature range of the sensor is -10°C~55°C.

1. Select a place where the sensor can be installled.

2. Fix the sensor on the place you have selected by the double-sided tape.

3. Press the sensor for about 20 seconds.

Installation Instruction Groove
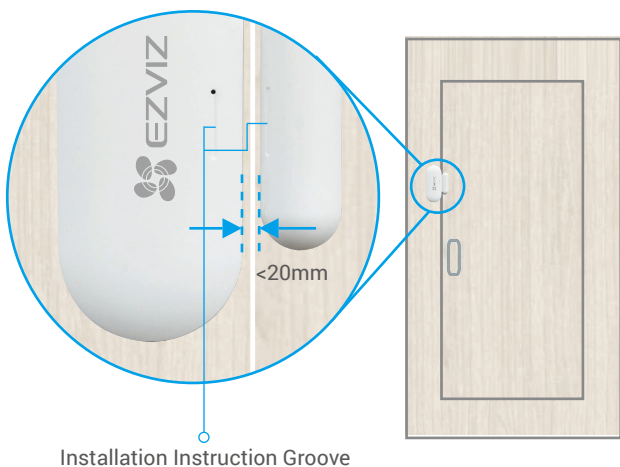
Operations on the EZVIZ App

ℹ The app interface may be different due to version update, and the interface of the app you installed on your phone shall prevail.

1. Homepage

Launch the EZVIZ app, open the homepage of the related gateway, you can manage your detector as needed on the page.

Log	Detection log of the detector.
Dismiss	Clear alarms of the detector.

2. Settings

Parameter	Description
Device Name	Customize the name of your device.
Alarm Settings	When enabled, a warning will be issued if the door contact is triggered. You can set the notification parameters as needed.
Linkage Camera	Select your camera to connect to the detector. Once connected, the camera will turn to the place when the detector is opened or closed.
Related Devices	You can see the gateway connected to your detector.
Device Information	You can see the device information here.
Share	Share your device.
Delete Device	Tap to delete the detector from EZVIZ cloud.