

W6 (SD09G)

9-Port Gigabit Ethernet Switch

Enjoy a stable, high-speed network.

Specially optimized for smart home and smart security products, the EZVIZ W6 Switch makes it easy for you to expand your network capacity and build a stable, high-speed smart system.



High Priority Red Port



Long-Distance Mode



Gigabit Speed




Optimized for Smart Security Cameras



Three red ports for prioritized traffic.

The W6-SD09G Switch provides three priority red ports for latency-sensitive devices like security cameras, ensuring smooth media traffic so you can enjoy high-quality live streaming.

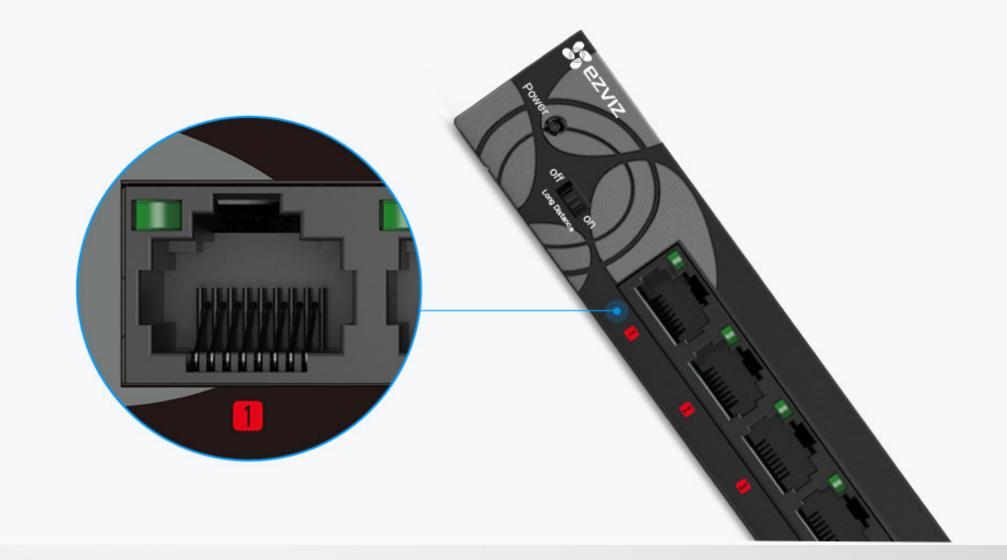

All gigabit Ethernet ports.

Nine gigabit Ethernet ports offer 10-times higher speeds over traditional 100 Mbps ports. This way, the W6 Switch allows you to build a stable and robust network in a variety of environments: homes, large apartment buildings, small offices, and much more.




A switch that goes the distance.

Switch between the regular mode and the ultra-long-distance mode to suit any need.

*When long-distance mode is enabled, the internet speed will decrease to 10 Mbps.

Actual transmission distance is subject to the quality of the cable and the RJ45 connector.

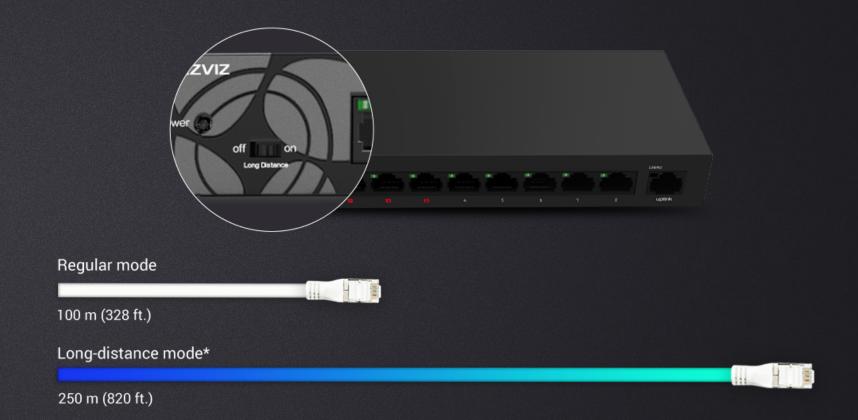

Easy to use.

Expand your network capacity instantly and effortlessly with the W6 Switch. It's a plug and play solution to connect your network devices.



Which EZVIZ W6 Switch is right for you?









Model	CS-W6-SD05G	CS-W6-SD05GP	CS-W6-SD09G	CS-W6-SD09GP
PoE	No	√	No	√
# Gigabit Ethernet Ports	5 × 1G	5 × 1G (Ports 1-4 support PoE)	9 × 1G	9 × 1G (Ports 1-8 support PoE)
Output Power	5W	50W	9W	90W
Power Supply	DC 12V ±10%	DC 48V ±10%	DC 12V ±10%	DC 48V ±10%
Exchange Capacity	10 Gbps	10 Gbps	18 Gbps	18 Gbps
Weight	243 g (0.54 lb)	254 g (0.56 lb)	370 g (0.82 lb)	375 g (0.83 lb)

Specifications cs-w6-sd09G

Number of Ports 9

Network Standard IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3x,

Ports 9 Ports with 1000 Mbps RJ45

Exchange Capacity 18 Gbps

Power Consumption 9W

Power Supply DC 12V ±10%

Dimensions $196 \times 95 \times 27 \text{ mm} (7.72 \times 3.74 \times 1.06 \text{ inch})$

Packaging Dimensions $286 \times 238 \times 77 \text{ mm} (11.26 \times 9.37 \times 3.03 \text{ inch})$

Power Cable Length 1.5 m (4.92 ft.)

Weight 370 g (0.82 lb)

In the box:

- W6 Switch
- Power adapter 1.5 m (4.92 ft.)
- Anchor × 2
- Rubber Cap × 4
- Quick Start Guide

Certifications:

UL/FCC/CE/RoHS/REACH/WEEE

Operating Conditions:

- Temperature: 0°C to 40°C (32°F to 104°F)
- Humidity: 90% or less