

COPYRIGHT © Hangzhou EZVIZ Software Co., Ltd.. ALL RIGHTS RESERVED.

Any and all information, including, among others, wordings, pictures, graphs are the properties of Hangzhou EZVIZ Software Co., Ltd. (hereinafter referred to as "EZVIZ"). This user manual (hereinafter referred to as "the Manual") cannot be reproduced, changed, translated, or distributed, partially or wholly, by any means, without the prior written permission of EZVIZ. Unless otherwise stipulated, EZVIZ does not make any warranties, guarantees or representations, express or implied, regarding to the Manual.


### **About this Manual**

The Manual includes instructions for using and managing the product. Pictures, charts, images and all other information hereinafter are for description and explanation only. The information contained in the Manual is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version in the EZVIZ™ website (<http://www.ezvizlife.com>).

### **Revision Record**

New release – January, 2019

### **Trademarks Acknowledgement**

EZVIZ™, ™, and other EZVIZ's trademarks and logos are the properties of EZVIZ in various jurisdictions. Other trademarks and logos mentioned below are the properties of their respective owners.

### **Legal Disclaimer**

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, IS PROVIDED "AS IS", WITH ALL FAULTS AND ERRORS, AND EZVIZ MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY. IN NO EVENT WILL EZVIZ, ITS DIRECTORS, OFFICERS, EMPLOYEES, OR AGENTS BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA OR DOCUMENTATION, IN CONNECTION WITH THE USE OF THIS PRODUCT, EVEN IF EZVIZ HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.


TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL EZVIZ'S TOTAL LIABILITY FOR ALL DAMAGES EXCEED THE ORIGINAL PURCHASE PRICE OF THE PRODUCT.

EZVIZ DOES NOT UNDERTAKE ANY LIABILITY FOR PERSONAL INJURY OR PROPERTY DAMAGE AS THE RESULT OF PRODUCT INTERRUPTION OR SERVICE TERMINATION CAUSED BY: A) IMPROPER INSTALLATION OR USAGE OTHER THAN AS REQUESTED; B) THE PROTECTION OF NATIONAL OR PUBLIC INTERESTS; C) FORCE MAJEURE; D) YOURSELF OR THE THIRD PARTY, INCLUDING WITHOUT LIMITATION, USING ANY THIRD PARTY'S PRODUCTS, SOFTWARE, APPLICATIONS, AND AMONG OTHERS.

REGARDING TO THE PRODUCT WITH INTERNET ACCESS, THE USE OF PRODUCT SHALL BE WHOLLY AT YOUR OWN RISKS. EZVIZ SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER ATTACK, HACKER ATTACK, VIRUS INSPECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, EZVIZ WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED. SURVEILLANCE LAWS AND DATA PROTECTION LAWS VARY BY JURISDICTION. PLEASE CHECK ALL RELEVANT LAWS IN YOUR JURISDICTION BEFORE USING THIS PRODUCT IN ORDER TO ENSURE THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. EZVIZ SHALL NOT BE LIABLE IN THE EVENT THAT THIS PRODUCT IS USED WITH ILLEGITIMATE PURPOSES.

IN THE EVENT OF ANY CONFLICTS BETWEEN THE ABOVE AND THE APPLICABLE LAW, THE LATTER PREVAILS.

## 同梱物



ベースステーション



カメラ



電源アダプタ  
(ベースステーション用)



電源アダプタ (カメラ用)



USB ケーブル



ドリルテンプレート



磁気ベース



ネジベース



マウントプレート



ネジキット



規制情報




クイックスタートガイド

**i** 必要に応じて別にカメラを購入することもできます。


## 基本操作

### カメラ

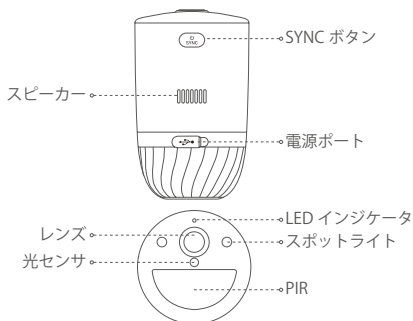

名前	説明
SYNC ボタン	<ul style="list-style-type: none"><li>電源オン：シャットダウン状態で2秒間保持します。</li><li>リセットし、ペアリングを準備します。2秒間そのまま保持します。</li><li>電源オフ：ボタンを1秒以内に3回押ししてください。</li></ul>
電源ポート	カメラの充電用です。
LED インジケータ	<ul style="list-style-type: none"><li>青く点灯：カメラが起動しているか EZVIZ アプリにライブビューが表示されています。</li><li>速く青で点滅：カメラのペアリングの準備が整いました / ペアリング中です。</li><li>ゆっくり赤で点滅：ネットワーク例外です。</li><li>速く赤で点滅：カメラの異常です。</li><li>緑色で点灯：カメラはフル充電されています。</li><li>ゆっくり緑色で点灯：充電中です。</li></ul>

## ベースステーション

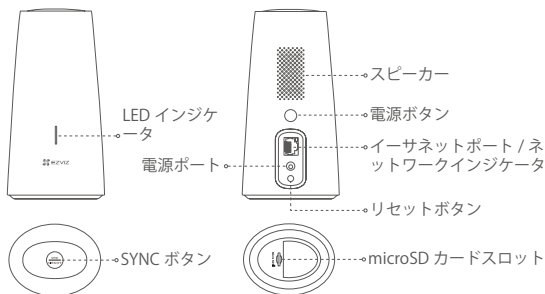


名前	説明
LED インジケータ	<ul style="list-style-type: none"><li>・ 緑色で点灯：ベースステーションは正常に機能しています。</li><li>・ 青く点灯：ベースステーションがインターネットに接続されていません。</li><li>・ 青で点滅：ベースステーションはカメラとペアリングしています。</li><li>・ 白で点灯：工場出荷時の設定を正常に復元します。</li><li>・ 赤く点滅：アラームが発生しています。</li><li>・ 赤く点灯：microSD カードのエラー。</li></ul>
SYNC ボタン	<ul style="list-style-type: none"><li>・ 短く押すとアラームが発生したときにサイレンをオフになります。</li><li>・ 2 秒間長押ししてカメラとのペアリングを開始します（ペアリングは最大 2 分かかります）。</li></ul>
電源ボタン	押すたびに電源がオンまたはオフになります。
ネットワークインジケータ	緑色で点灯：イーサネットケーブルが接続されています。
リセットボタン	5 秒間長押しすると再起動して、パラメータがすべてデフォルトにリセットされます。

## セットアップ

### ステップ 1：カメラを充電する（オプション）


カメラを電源アダプター（5V 2A）でコンセントに接続します。  
カメラの電源が切れている場合は、SYNC ボタンを短く押して電源を入れます。



- ① 充電前に壁からカメラを外してください。
- ・ 気温が 45 度を超えたり、0 度以下になった場合は充電しないでください。
- ・ 屋外で電源アダプターを使用して充電できません。
- ・ 充電中はカメラの電源が自動的に入ります。


### ステップ 2：ベースステーションの電源を入れる

ベースステーションを電源アダプター（12V 1A）でコンセントに接続します。

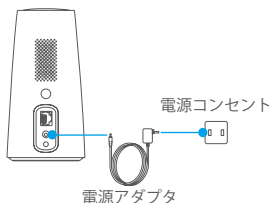

### ステップ3：インターネットへのベースステーションの接続

ベースステーションをルーターの空いているLANポートにイーサネットケーブルで接続します。

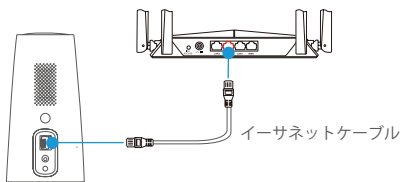

- i** ルーターがインターネットに接続できることを確認してください。

### ステップ4：EZVIZ アプリの入手


1. スマートフォンをインターネットに接続します。
2. App Store または Google Play™ で EZVIZ を検索します。
3. EZVIZ アプリをダウンロードしてインストールします。
4. アプリを起動し、EZVIZ ユーザーアカウントを登録します。

### ステップ5：EZVIZ アカウントにベースステーションを追加します。

1. EZVIZ アプリにログインします。
2. ホーム画面で右上隅の「+」をタップし、QRコードスキャンインターフェイスを開きます。



3. ベースステーション底面にある QR コードをスキャンするか、シリアル番号を手動で入力してベースステーションを追加します。

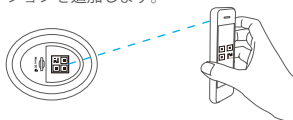


4. EZVIZ アプリのウィザードに従って、ベースステーションのネットワーク設定を完了します。
5. ベースステーションが EZVIZ アカウントに正常に追加されたら、「Next」（次へ）をタップしてカメラをベースステーションにリンクします。

### ステップ6：ベースステーションとカメラのペアリング

1. ベースステーションの SYNC ボタンを 2 秒間押し続けます。LED インジケータが青く点滅します。



2. カメラをベースステーションから 30 ~ 100cm 離して設置します。カメラの SYNC ボタンを 2 秒間押し続けます。LED インジケータが青色に高速点滅します。

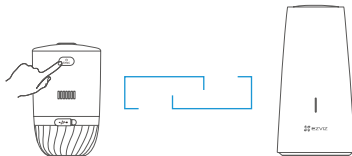

3. 約 120 秒待ち、🔄をタップして現在のページを更新します。


- i**
- ・カメラのLEDが赤くゆっくりと点滅している場合は、ペアリングに失敗したことを示します。この場合、上のステップを繰り返して再度試してください。
  - ・各ベースステーションと同時に最大4台のカメラをペアリングすることができます。

## カメラの取付


### 設置場所

視界が遮られず、ベースステーションへの無線電波が良好な場所を選んでください。以下のヒントを念頭に置いてください：

- 壁面がカメラの重量の3倍まで耐えられる十分な強度を持っていることを確認してください。
- カメラはエアコンの前や、直射日光に向けて設置することはできません。
- 推奨設置高度：地上2～3mの高さ。

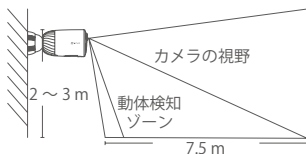

- 左右のトラフィックがカメラの視野を横切っていることを確認します。カメラのモーションセンサーは、カメラに直接近づいたり離れたったりする動きよりも、視野内での左右の動きにはるかに敏感です。



- 場所を選択するときは、EZVIZアプリで検出感度を設定することをお勧めします。このように、カメラの設置場所で動きが検出できるかどうかを確認し、検出された物体の大きさや距離に応じて感度を調整することができます。

### インストール手順

**ステップ1** ドリルテンプレートを清浄で平らな表面に置きます。

**ステップ2 (セメント壁の場合のみ)** テンプレートに沿ってネジ穴を開け、アンカーを挿入します。

**ステップ3** 取付板をテンプレートに合わせてネジで固定します。

**ステップ4** マグネットベース (図1) またはネジベース (図2) をマウンティングプレートに対して回転させます。

**ステップ5** ベースにカメラを取り付けます。

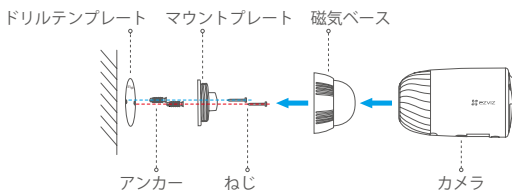


図1 マグネットベースによる取り付け

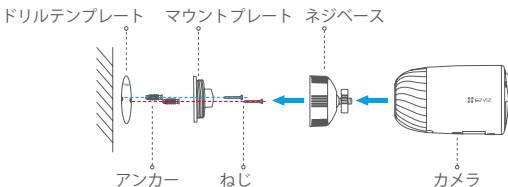


図2 ネジベースによる取り付け

**i** 詳細については [www.ezvizlife.com](http://www.ezvizlife.com) を参照してください。