

COPYRIGHT © Hangzhou EZVIZ Software Co., Ltd. ALL RIGHTS RESERVED.

Any and all information, including, among others, wordings, pictures, graphs are the properties of Hangzhou EZVIZ Software Co., Ltd. (hereinafter referred to as “EZVIZ”). This user manual (hereinafter referred to as “the Manual”) cannot be reproduced, changed, translated, or distributed, partially or wholly, by any means, without the prior written permission of EZVIZ. Unless otherwise stipulated, EZVIZ does not make any warranties, guarantees or representations, express or implied, regarding to the Manual.


### **About this Manual**

The Manual includes instructions for using and managing the product. Pictures, charts, images and all other information hereinafter are for description and explanation only. The information contained in the Manual is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version in the EZVIZ™ website (<http://www.ezviz.com>).

### **Revision Record**

New release – January, 2025

### **Trademarks Acknowledgement**

EZVIZ™, ™, and other EZVIZ's trademarks and logos are the properties of EZVIZ in various jurisdictions. Other trademarks and logos mentioned below are the properties of their respective owners.

### **Legal Disclaimer**

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, IS PROVIDED “AS IS”, WITH ALL FAULTS AND ERRORS, AND EZVIZ MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY. IN NO EVENT WILL EZVIZ, ITS DIRECTORS, OFFICERS, EMPLOYEES, OR AGENTS BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA OR DOCUMENTATION, IN CONNECTION WITH THE USE OF THIS PRODUCT, EVEN IF EZVIZ HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL EZVIZ'S TOTAL LIABILITY FOR ALL DAMAGES EXCEED THE ORIGINAL PURCHASE PRICE OF THE PRODUCT.

EZVIZ DOES NOT UNDERTAKE ANY LIABILITY FOR PERSONAL INJURY OR PROPERTY DAMAGE AS THE RESULT OF PRODUCT INTERRUPTION OR SERVICE TERMINATION CAUSED BY: A) IMPROPER INSTALLATION OR USAGE OTHER THAN AS REQUESTED; B) THE PROTECTION OF NATIONAL OR PUBLIC INTERESTS; C) FORCE MAJEURE; D) YOURSELF OR THE THIRD PARTY, INCLUDING WITHOUT LIMITATION, USING ANY THIRD PARTY'S PRODUCTS, SOFTWARE, APPLICATIONS, AND AMONG OTHERS.

REGARDING TO THE PRODUCT WITH INTERNET ACCESS, THE USE OF PRODUCT SHALL BE WHOLLY AT YOUR OWN RISKS. EZVIZ SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER ATTACK, HACKER ATTACK, VIRUS INSPECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, EZVIZ WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED. SURVEILLANCE LAWS AND DATA PROTECTION LAWS VARY BY JURISDICTION. PLEASE CHECK ALL RELEVANT LAWS IN YOUR JURISDICTION BEFORE USING THIS PRODUCT IN ORDER TO ENSURE THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. EZVIZ SHALL NOT BE LIABLE IN THE EVENT THAT THIS PRODUCT IS USED WITH ILLEGITIMATE PURPOSES.

IN THE EVENT OF ANY CONFLICTS BETWEEN THE ABOVE AND THE APPLICABLE LAW, THE LATTER PREVAILS.

# Table of Contents

<b>Overview .....</b>	<b>1</b>
1. Package Contents .....	1
2. Basics .....	2
<b>Setup.....</b>	<b>3</b>
1. Get the EZVIZ App .....	3
2. Power on the Camera.....	4
3. Add the Camera to Your EZVIZ Account .....	4
<b>Camera Installation .....</b>	<b>5</b>
1. Install a microSD Card (Optional).....	5
2. Place the Camera .....	5
<b>View Your Camera .....</b>	<b>6</b>
1. Homepage.....	6
2. Live View.....	7
3. Settings.....	8
<b>EZVIZ Connect.....</b>	<b>9</b>
1. Use Amazon Alexa.....	9
2. Use Google Assistant .....	9
<b>FAQ .....</b>	<b>11</b>
<b>Initiatives on the Use of Video Products.....</b>	<b>12</b>
<b>Appendix .....</b>	<b>13</b>
1. Rechargeable Lithium Ion Battery .....	13
2. INFORMATION FOR PRIVATE HOUSEHOLDS .....	13

# Overview


## 1. Package Contents



Camera (x1)



Power Cable (x1)



Power Adapter (x1)



Regulatory Information (x2)









Quick Start Guide (x1)

**i** The power adapter's appearance is subject to the one you have bought.

2. Basics






Front View

Name	Description	
LED Indicator		Solid Red: Camera starting up.
		Slow-flashing Red: Network exception.
		Fast-flashing Red: Camera exception.
		Solid Blue: Camera starting up or being live viewed in the EZVIZ App.
		Slow-flashing Blue: Camera working properly.
		Fast-flashing Blue: Camera ready for network configuration.
ON/OFF Button	Press the button once to turn it on/off.	



Top View

Name	Description
Answer Button & End Button	<ul style="list-style-type: none"><li>Press the Answer Button to answer a call or press the End Button to end a call.</li><li> When a call is connected, the Answer Button/End Button can work properly.</li><li>During non-calling time, both of the buttons are used as quick call buttons.</li><li>You can also use the EZVIZ App (tap "Call Settings &gt; Quick Call Settings" on the camera homepage) to set the two buttons as quick call buttons.</li></ul>
Privacy Shutter	(Off By Default )Slide it to the left to cover the lens to enable the privacy mode. In privacy mode, no live view is available in the EZVIZ App.  The privacy mode cannot be turned off remotely.

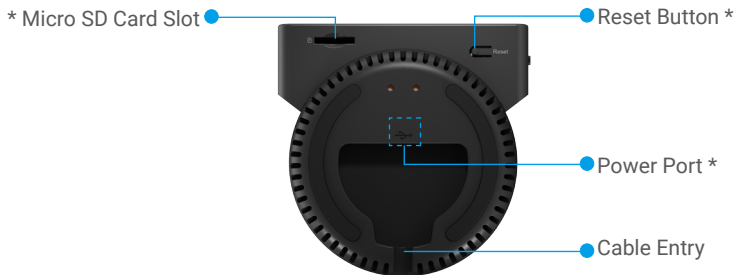

**Bottom View**

Name	Description
Micro SD Card Slot	Insert a micro SD card (sold separately) into this slot. Initialize the card in the EZVIZ App before using it. Recommended compatibility: Class 10, maximum space 512GB.
Reset Button	When the camera is working, press and hold the button for about 4s and the camera will restart. <b>i</b> Camera restarting will clear all user information. Please operate with caution.
Power Port	Power on the camera.


## Setup

Follow the steps below to set your camera:

1. Get the EZVIZ App, and log in to your EZVIZ App account.
2. Power on the camera.
3. Add the camera to your EZVIZ account.

### 1. Get the EZVIZ App

1. Connect your mobile phone to Wi-Fi (suggested).
2. Download and install the EZVIZ App by searching for "EZVIZ" in the App Store or Google Play™.
3. Launch the app and register an EZVIZ user account.

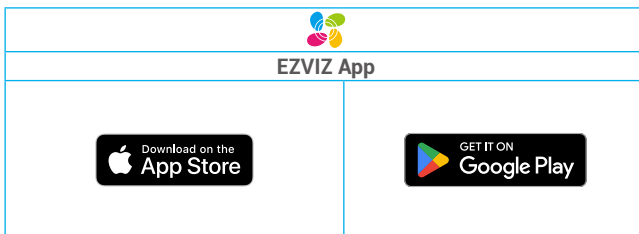

**i** If you have already used the app, please make sure that it is the latest version. To find out if an update is available, go to the app store and search for "EZVIZ".

## 2. Power on the Camera


1. Connect the power cable to the power adapter and the camera's power port.
2. Plug the power adapter into an power outlet.



- When the LED indicator of the camera becomes fast-flashing blue, it indicates that the camera is powered on and ready for Wi-Fi configuration.
- The power outlet shall be installed near the power adapter and shall be easily accessible.
- It is recommended to use the power cable and power adapter included in the package

## 3. Add the Camera to Your EZVIZ Account

1. Log in to your EZVIZ App account.
2. On the Home screen, tap “+” on the upper-right corner to go to the Scan QR Code interface.
3. Scan the QR code on the Quick Start Guide cover, on the bottom of the camera, or on the touch panel of the camera.

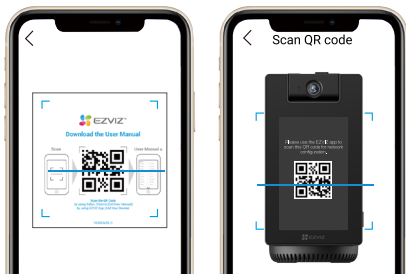

4. Follow the EZVIZ App wizard to finish Wi-Fi configuration and add the camera to your EZVIZ account.

- Please connect your camera to the Wi-Fi network to which your mobile phone has been connected.
- If the camera fails to connect your Wi-Fi network, press and hold the Reset button for about 4s to restart the camera and repeat the steps above.
- If you want to connect the camera to another Wi-Fi network, go to **Settings > Network Settings** in EZVIZ App to change the Wi-Fi network.

# Camera Installation

## 1. Install a Micro SD Card (Optional)

1. Insert a micro SD card (sold separately) into the micro SD card slot on the bottom of the camera.



**i** After installing the micro SD card, you should initialize the card in the EZVIZ App before using it.

2. In the EZVIZ App, tap **Storage Status** in the **Device Settings** interface to check the SD card status.
3. If the micro SD card status displays as **Uninitialized**, tap to initialize it.

**i** The status will then change to **Normal** and then videos can be stored.


## 2. Place the Camera

Place the camera on a stable, flat surface.

**i** The recommended installation height is no higher than 1.8m (5.9 feet).











# View Your Camera

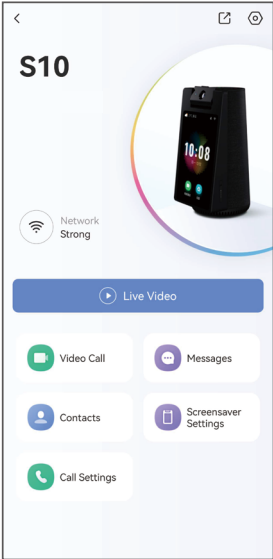 The app interface may be different due to version update, and the interface of the app you installed on your phone shall prevail.

## 1. Homepage

Launch the EZVIZ App, tap the camera card to enter the homepage (as shown below).




Icon	Description
	Network. View the current network status.
	Live Video. Tap to view the live video and perform related operations. For more details, please refer to " <b>Live View</b> " part.
	Video Call. Tap to initiate a video call to the camera.
	Contacts. Tap to add contact or custom auto call connection.
	Call Settings. You can custom auto call connection, make quick call settings and etc..
	Messages. You can view all records from call log and intelligent detection.
	Screensaver Settings. You can set auto sleep interval and screensaver.







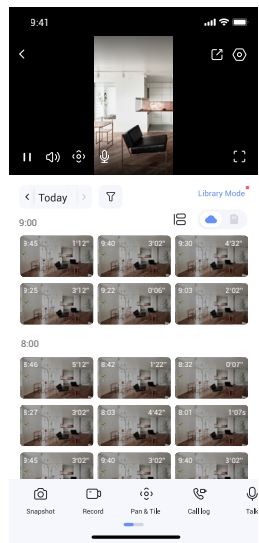









## 2. Live View

You can watch a live feed, take snapshots, record videos, or choose video definition as needed.





 Swipe left and right across the screen to see more icons.

Icon	Description
	Share. Share your camera with anyone you want.
	Settings. View or change the camera settings.
	Snapshot. Take a snapshot.
	Record. Manually start/stop recording.
	PTZ. Rotate the camera to get a broader field of view. Tap the four arrow buttons below the live view to adjust the PTZ lens.  You can tap the icon below the PTZ to collect the current PTZ location.
	Video Call. Tap to initiate a video call to the camera.
	Talk. Tap the icon, and then follow the on-screen instructions to talk to or listen to people in front of the camera.
	Definition. Select video resolution as you needed.
	360° Picture. Tap to generate a 360 degree view picture.
	Nearby Device. Tap to check available cameras nearby.
	PiP. View the video displayed on top of another app you are using.
	Tip.Tap to see more information about the camera.
	Rearrange. Rearrange the sequence of all the functions above.

### 3. Settings

On the settings page, you can set the parameters of the camera.

Parameter	Description
Name	View or tap to customize the name of your camera here.
Call Settings	You can custom auto call connection, make quick call settings and etc..
Intelligent Detection	You can select between different detection types for your camera.
Message Notification	You can manage the camera message and EZVIZ App notification.
Audio Settings	You can set relevant audio parameters for your camera.
Image Settings	You can set relevant image parameters for your camera.
Screen Settings	You can set the brightness of the screen and the auto sleep interval.
Light Settings	You can set relevant light parameters for your camera.
PTZ Settings	You can set parameters of PTZ for your camera, like Human Tracking, PTZ Position Calibration and PTZ Preset here.
Record List	You can select between different recording types for your camera and see the micro SD card status here.
Privacy Settings	You can encrypt your videos with encryption password.
Network Settings	You can see the Wi-Fi the device is connected to and the Wi-Fi signal status here.
Device Information	You can see the camera information here, including the user guide.
Share Device	You can share the camera to your family member or guest.
EZVIZ Cloud	You can subscribe and manage the cloud storage.  The function is only available in certain countries. Please verify the availability in your conuntry before purchasing.
Phone Alarm Service	When enabled, there is a phone call to remind you for alarm triggered.  • The function is only available in certain countries. Please verify the availability in your conuntry before purchasing. • The producer reserves the right of final explanation.
Restart Device	Tap to restart the camera.
Delete Device	Tap to delete the camera from EZVIZ App.

## 1. Use Amazon Alexa

These instructions will enable you to control your EZVIZ devices with Amazon Alexa. If you run into any difficulties during the process, please refer to **Troubleshooting**.

### Before you start, make sure that:


1. EZVIZ devices are connected to the EZVIZ app.
2. In the EZVIZ app, turn off the "Video Encryption" and turn on the "Audio" in the Device Settings page.
3. You have an Alexa-enabled device (i.e Echo Spot, Echo-Show, All-new Echo-Show, Fire TV (all generations), Fire TV stick (second generation only), or Fire TV Edition smart TVs).
4. The Amazon Alexa app is already installed on your smart device, and you have created an account.

### To Control EZVIZ devices with Amazon Alexa:

1. Open the Alexa app and select "Skills and Games" from the menu.
2. On the Skills and Games screen, search for "EZVIZ", and you will find "EZVIZ" skills.
3. Select your EZVIZ device's skill, then tap **ENABLE TO USE**.
4. Enter your EZVIZ username and password, and tap **Sign in**.
5. Tap the **Authorize** button to authorize Alexa to access your EZVIZ account, so that Alexa can control your EZVIZ devices.
6. You will see "EZVIZ has been successfully linked", then tap **DISCOVER DEVICES** to allow Alexa to discover all your EZVIZ devices.
7. Go back to Alexa app menu and select "Devices", and under devices you will see all your EZVIZ devices.

### Voice Command

Discover a new smart device via the "Smart Home" menu in the Alexa app or the Alexa Voice Control function. Once the device is found, you can control it with your voice. Speak simple commands to Alexa.

-  Your device's name for example: "show xxxx camera," can be changed in the EZVIZ app. Each time you change the name of the device, you will need to discover the device again to update the name.

### Troubleshooting

#### What should I do if Alexa fails to discover my device?

Check if there are any Internet connecting problems.

Try to restart the smart device and re-discover the device on Alexa.

#### Why the device's status is "Offline" on Alexa?

Your device might have been disconnected from the network. Restart the smart device and re-discover on Alexa.

Check if your router is connected to the Internet and try again.

-  For details about countries where Amazon Alexa is available, see [Amazon Alexa's official website](#).

## 2. Use Google Assistant

With the Google Assistant, you can activate your EZVIZ device and watch live by speaking Google Assistant voice commands.

### The following devices and apps are required:

1. A functional EZVIZ app.
2. In the EZVIZ app, turn off the "Video Encryption" and turn on the "Audio" in the Device Settings page.
3. A TV with functional Chromecast connecting to it.
4. The Google Assistant app on your phone.

### To get started, follow the steps below:

1. Set up the EZVIZ device and make sure it works properly on the app.
2. Download the Google Home app from the App Store or Google Play Store™ and log into your Google account.
3. On the Myhome screen, tap "+" on the upper-left corner, and select "Set up device" from the menu list to go to the Set up interface.
4. Tap **Works with Google**, and search for "EZVIZ", where you will find "EZVIZ" skills.
5. Enter your EZVIZ username and password, and tap **Sign in**.

6. Tap the **Authorize** button to authorize Google to access your EZVIZ account, so that Google can control your EZVIZ devices.
7. Tap **Return to app**.
8. Follow the above steps to complete the authorization. When synchronization is completed, EZVIZ service will be listed under your list of services. To see a list of compatible devices under your EZVIZ account, tap on the EZVIZ service icon.
9. Now try some commands. Use the name of the camera that you created when you set up the system.

Users can manage devices as a single entity or in a group. Adding devices to a room allows users to control a group of devices at the same time using one command.

See the link for more information:

<https://support.google.com/googlehome/answer/7029485?co=GENIE.Platform%3DAndroid&hl=en>

## FAQ

**Q: If the camera is offline on the App, will the video recording be continued?**

A: If the camera is powered on but disconnect to the Internet, then local recording will continue but cloud recording will stop. If the camera is powered off, both video recordings will stop.

**Q: Why the alarm is triggered when nobody in the image?**

A: Try to set the alarm sensitivity lower. Please notice that vehicle and animals are also the trigger source.

**Q: Why the alarm is not triggered when there is human appear in the PIR detection area?**

A:

- Try to set the alarm sensitivity higher.
- Make sure that there is someone in detection area, and the PIR detection distance is 9 meters when the detection sensitivity is set to 100.
- Limited by PIR detection technology, the camera may fail to detect motion when environment temperature is close to human body temperature or someone approaches the PIR sensor vertically.

 For additional information about the device, please refer to [www.ezviz.com/eu](http://www.ezviz.com/eu).

# Initiatives on the Use of Video Products

Dear Valued EZVIZ Users,

Technology affects every aspect of our life. As a forward-looking tech company, we are increasingly aware of the role technology plays in improving efficiency and quality of our life. At the same time, we are also aware of the potential harm of its improper usage. For example, video products can record real, complete and clear images, therefore they hold great values in representing facts. Nevertheless, improper distribution, use and/or processing of video records may infringe on the privacy, legitimate rights and interests of others.

Committed to innovating technology for the good, we at EZVIZ hereby earnestly advocate that every user shall use video products properly and responsibly, thus to collectively create a positive environment where all related practices and usage comply with applicable laws and regulations, respect individuals' interests and rights, and promote social morality.

Here are EZVIZ's initiatives that we'd appreciate your attention:

1. Each individual possesses a reasonable expectation of privacy, and the use of video products should not be in conflict with such reasonable expectation. Therefore, a warning notice which clarifies the monitoring range should be displayed in a reasonable and effective manner, when installing video products in public areas. For non-public areas, the rights and interests of people involved shall be evaluated thoughtfully, including but not limited to, installing video products only after obtaining the consent of the stakeholders, and not installing highly-invisible video products without other's knowledge.

2. Video products objectively records footage of real activities within specific time and space. Users shall reasonably identify the people and rights involved in this scope in advance, to avoid any infringement of portrait, privacy or other legal rights of others while protecting themselves through video products. Notably, if you choose to enable the audio recording function on your camera, it will capture sounds, including conversations, within the monitoring range. We highly recommend a comprehensive assessment on the potential sound sources in the monitoring range, so as to fully understand the necessity and the reasonableness before you turn on the audio recording function.

3. Video products in use will consistently generate audio or visual data from real scenes –possibly including biometric information such as facial images – based on the user's selection of product features. Such data can be used or processed to use. Video products are only technological tools that do not and cannot humanly practice legal and moral standards to guide lawful and proper use of data. It is the methods and purposes of the people who control and use the generated data that make a difference. Therefore, data controllers shall not only strictly abide by applicable laws and regulations, but also fully respect non-obligatory rules including international conventions, moral standards, cultural norms, public order and local customs. Furthermore, we should always prioritize the protection of privacy and portrait rights, and other reasonable interests.

4. The video data continuously generated by video products carries the rights, values and other demands of various stakeholders. Thus, it is extremely crucial to ensure data security and shield the products from malicious intrusions. Every user and data controller shall, undertake all reasonable and necessary measures to maximize product and data security, avoiding data leakage, improper disclosure or misuse, including but not limited to, setting up access control, selecting a suitable network environment where video products are connected, establishing and constantly optimizing network security.

5. Video products have made great contributions to enhance the safety of our society, and we believe that they will continue to play a positive role in various aspects of our daily life. Any attempt to abuse these products to violate human rights or engage in unlawful activities contradicts the very essence of the value in tech innovation and product development. We encourage every user to establish your own methods and rules to evaluate and monitor the use of video products, so as to ensure that these products are always used properly, thoughtfully and with goodwill.

## INFORMATION FOR PRIVATE HOUSEHOLDS

1. Separate collection of waste equipment: Electrical and electronic equipment that has become waste is referred to as waste equipment. Owners of waste equipment must dispose of it separately from unsorted municipal waste. In particular, waste equipment does not belong in household waste, but in special collection and return systems.

2. Batteries and rechargeable batteries as well as lamps: Owners of waste equipment shall, as a rule, separate waste batteries and rechargeable batteries that are not enclosed in the waste equipment, which can be removed from the waste equipment without being destroyed, from the waste equipment before handing them in at a collection point. This does not apply if waste equipment is prepared for reuse with the participation of a public waste management authority.

3. Options for returning waste equipment: Owners of waste equipment from private households can return it free of charge to the collection points of the public waste management authorities or to the take-back points set up by manufacturers or distributors within the meaning of the Electrical and Electronics Equipment Law. Stores with a sales area of at least 400 m<sup>2</sup> for electrical and electronic equipment and those grocery stores with a total sales area of at least 800 m<sup>2</sup> that offer electrical and electronic equipment several times a year or on a permanent basis and make it available in the market are required to take it back. This also applies in the case of distribution using means of distance communication, if the storage and shipping areas for electrical and electronic equipment are at least 400 m<sup>2</sup> or the total storage and shipping areas are at least 800 m<sup>2</sup>. Distributors shall, in principle, ensure take-back by providing suitable return facilities at a reasonable distance from the respective end user. The possibility of returning waste equipment free of charge exists for distributors who are obliged to take it back, among other things, if a new similar device that essentially fulfills the same functions is delivered to an end user.

4. Privacy Notice: Waste equipment often contains sensitive personal data. This applies in particular to devices of information and telecommunications technology such as computers and smartphones. In your own interest, please note that each end user is responsible for deleting the data on the waste equipment to be disposed of.

5. Meaning of the symbol “crossed-out wheelee bin”: The symbol of a crossed-out wheelee bin regularly depicted on electrical and electronic equipment indicates that the respective device is to be collected separately from unsorted municipal waste at the end of its service life.