

COPYRIGHT © Hangzhou EZVIZ Software Co., Ltd.. ALL RIGHTS RESERVED.

Any and all information, including, among others, wordings, pictures, graphs are the properties of Hangzhou EZVIZ Software Co., Ltd. (hereinafter referred to as "EZVIZ"). This user manual (hereinafter referred to as "the Manual") cannot be reproduced, changed, translated, or distributed, partially or wholly, by any means, without the prior written permission of EZVIZ. Unless otherwise stipulated, EZVIZ does not make any warranties, guarantees or representations, express or implied, regarding to the Manual.



About this Manual

The Manual includes instructions for using and managing the product. Pictures, charts, images and all other information hereinafter are for description and explanation only. The information contained in the Manual is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version in the **EZVIZ™** website (<http://www.ezvizlife.com>).

Revision Record

New release – January, 2019

Trademarks Acknowledgement

 **EZVIZ™**,  **™**, and other EZVIZ's trademarks and logos are the properties of EZVIZ in various jurisdictions. Other trademarks and logos mentioned below are the properties of their respective owners.

Legal Disclaimer

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, IS PROVIDED "AS IS", WITH ALL FAULTS AND ERRORS, AND EZVIZ MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY. IN NO EVENT WILL EZVIZ, ITS DIRECTORS, OFFICERS, EMPLOYEES, OR AGENTS BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA OR DOCUMENTATION, IN CONNECTION WITH THE USE OF THIS PRODUCT, EVEN IF EZVIZ HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL EZVIZ'S TOTAL LIABILITY FOR ALL DAMAGES EXCEED THE ORIGINAL PURCHASE PRICE OF THE PRODUCT.

EZVIZ DOES NOT UNDERTAKE ANY LIABILITY FOR PERSONAL INJURY OR PROPERTY DAMAGE AS THE RESULT OF PRODUCT INTERRUPTION OR SERVICE TERMINATION CAUSED BY: A) IMPROPER INSTALLATION OR USAGE OTHER THAN AS REQUESTED; B) THE PROTECTION OF NATIONAL OR PUBLIC INTERESTS; C) FORCE MAJEURE; D) YOURSELF OR THE THIRD PARTY, INCLUDING WITHOUT LIMITATION, USING ANY THIRD PARTY'S PRODUCTS, SOFTWARE, APPLICATIONS, AND AMONG OTHERS.

REGARDING TO THE PRODUCT WITH INTERNET ACCESS, THE USE OF PRODUCT SHALL BE WHOLLY AT YOUR OWN RISKS. EZVIZ SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER ATTACK, HACKER ATTACK, VIRUS INSPECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, EZVIZ WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED. SURVEILLANCE LAWS AND DATA PROTECTION LAWS VARY BY JURISDICTION. PLEASE CHECK ALL RELEVANT LAWS IN YOUR JURISDICTION BEFORE USING THIS PRODUCT IN ORDER TO ENSURE THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. EZVIZ SHALL NOT BE LIABLE IN THE EVENT THAT THIS PRODUCT IS USED WITH ILLEGITIMATE PURPOSES.

IN THE EVENT OF ANY CONFLICTS BETWEEN THE ABOVE AND THE APPLICABLE LAW, THE LATTER PREVAILS.

Chi tiết bộ sản phẩm



Camera (x1)



Tấm mẫu khoan (x1)




Bộ vít (x1)



Hướng dẫn sử dụng nhanh (x1)

Thông tin cơ bản

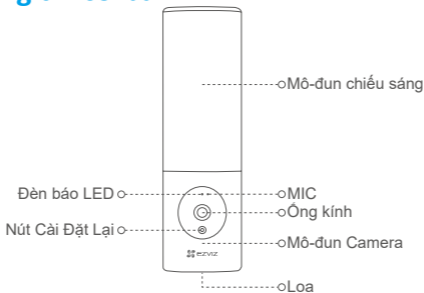

Tên

Đèn báo LED

Mô tả

- Sáng đỏ: Camera đang khởi động.
- Nháy chậm màu đỏ: Kết nối Wi-Fi không thành công.
- Nháy nhanh màu đỏ: Ngoại lệ camera (Ví dụ: Lỗi thẻ nhớ).
- Sáng xanh dương: Video được xem trực tiếp trong ứng dụng EZVIZ.
- Nháy chậm màu xanh dương: Camera đang hoạt động bình thường.
- Nháy nhanh màu xanh dương: Camera đã sẵn sàng để kết nối Wi-Fi.

Ống kính

Ống kính có thể điều chỉnh xuống dưới 15 độ.

Mô-đun camera

Mô-đun camera có thể xoay 10 độ sang trái và sang phải.


Nút Cài Đặt Lại

Giữ trong 4 giây để khởi động lại và đặt lại tất cả các thông số về mặc định.

Lắp đặt

- Chiều cao lắp đặt khuyến nghị: 6-7 ft (1,8-2,2 m) so với mặt đất.
- Camera có thể nhớ được tích hợp để lưu video. Không cần lắp thêm thẻ SD.


1. Tắt điện tại công tắc.



- Nếu bạn không biết công tắc nằm ở đâu hay không biết cách tắt điện, vui lòng tham khảo ý kiến của thợ điện được cấp phép.
- Duy trì trạng thái tắt của công tắc trong quá trình lắp đặt.


2. Tách đế gắn khỏi camera.

Tháo vít tám để bằng tước nơ vít (không bao gồm trong gói) và kéo đế gắn ra khỏi camera.




3. Lắp đế gắn.

- Đặt tám mẫu khoan lên bề mặt đã chọn để gắn đế.
- (Chỉ dành cho tường xi măng) Khoan lỗ vít theo tám mẫu và lắp nơ vít.
- Luồn dây từ tường qua tám mẫu khoan và cao su của đế gắn.
- Sử dụng vít để cố định đế gắn.

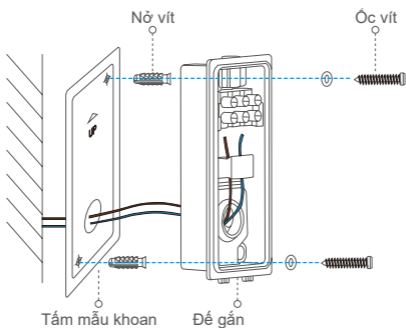

4. Kết nối dây.


- Lần lượt nối Dây trung tính (N) và Dây có điện (L).
- Cố định dây bằng tuốc nơ vít.



- 1 Dây có điện (L)
- 2 Dây trung tính (N)


5. Gắn camera vào đế gắn.

- Cố định phần dưới của đế gắn vào trong camera.
- Nhấn đế gắn và camera lại với nhau.
- Siết vít tấm để nằm phía trên cùng của camera.




6. Điều chỉnh góc độ của mô-đun camera.

Bạn có thể điều chỉnh góc ngang và dọc của mô-đun camera, nếu cần.




7. Khôi phục điện ở cầu dao điện.



8. Xác nhận camera có điện.

Sau khi khôi phục nguồn điện, camera sẽ ở trạng thái sẵn sàng thiết lập khi đèn sáng và Đèn báo LED ở mặt trước của camera nhấp nháy màu xanh dương.



Cài đặt

1. Tải ứng dụng EZVIZ


- Kết nối điện thoại di động của bạn vào mạng Wi-Fi.
- Tải xuống và cài đặt ứng dụng EZVIZ bằng cách tìm kiếm "EZVIZ" trong App Store hoặc Google Play Store™.
- Khởi chạy ứng dụng và đăng ký tài khoản người dùng trên EZVIZ.

2. Thêm camera vào EZVIZ

- Đăng nhập vào tài khoản của bạn bằng ứng dụng EZVIZ.
Trên màn hình Trang chủ, nhấn "+" ở góc trên bên phải màn hình để truy cập giao diện Quét mã QR.



- Quét mã QR trên trang bìa của hướng dẫn sử dụng này hoặc trên thân của camera.



- Làm theo hướng dẫn của ứng dụng EZVIZ để hoàn tất cấu hình Wi-Fi.

i Nếu bạn muốn thay đổi Wi-Fi của camera, hãy nhấn và giữ nút đặt lại trong 4 giây và lặp lại các bước trên.

i Để biết thông tin chi tiết, vui lòng tham khảo www.ezvizlife.com.