

COPYRIGHT © Hangzhou EZVIZ Software Co., Ltd. ALL RIGHTS RESERVED.

Any and all information, including, among others, wordings, pictures, graphs are the properties of Hangzhou EZVIZ Software Co., Ltd. (hereinafter referred to as “EZVIZ”). This user manual (hereinafter referred to as “the Manual”) cannot be reproduced, changed, translated, or distributed, partially or wholly, by any means, without the prior written permission of EZVIZ. Unless otherwise stipulated, EZVIZ does not make any warranties, guarantees or representations, express or implied, regarding to the Manual.

About this Manual

The Manual includes instructions for using and managing the product. Pictures, charts, images and all other information hereinafter are for description and explanation only. The information contained in the Manual is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version in the EZVIZ™ website (<http://www.ezvizlife.com>).

Revision Record

New release – January, 2022

Trademarks Acknowledgement

EZVIZ™, ™, and other EZVIZ's trademarks and logos are the properties of EZVIZ in various jurisdictions. Other trademarks and logos mentioned below are the properties of their respective owners.

Legal Disclaimer

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, IS PROVIDED “AS IS”, WITH ALL FAULTS AND ERRORS, AND EZVIZ MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY. IN NO EVENT WILL EZVIZ, ITS DIRECTORS, OFFICERS, EMPLOYEES, OR AGENTS BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA OR DOCUMENTATION, IN CONNECTION WITH THE USE OF THIS PRODUCT, EVEN IF EZVIZ HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL EZVIZ'S TOTAL LIABILITY FOR ALL DAMAGES EXCEED THE ORIGINAL PURCHASE PRICE OF THE PRODUCT.

EZVIZ DOES NOT UNDERTAKE ANY LIABILITY FOR PERSONAL INJURY OR PROPERTY DAMAGE AS THE RESULT OF PRODUCT INTERRUPTION OR SERVICE TERMINATION CAUSED BY: A) IMPROPER INSTALLATION OR USAGE OTHER THAN AS REQUESTED; B) THE PROTECTION OF NATIONAL OR PUBLIC INTERESTS; C) FORCE MAJEURE; D) YOURSELF OR THE THIRD PARTY, INCLUDING WITHOUT LIMITATION, USING ANY THIRD PARTY'S PRODUCTS, SOFTWARE, APPLICATIONS, AND AMONG OTHERS.

REGARDING TO THE PRODUCT WITH INTERNET ACCESS, THE USE OF PRODUCT SHALL BE WHOLLY AT YOUR OWN RISKS. EZVIZ SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER ATTACK, HACKER ATTACK, VIRUS INSPECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, EZVIZ WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED. SURVEILLANCE LAWS AND DATA PROTECTION LAWS VARY BY JURISDICTION. PLEASE CHECK ALL RELEVANT LAWS IN YOUR JURISDICTION BEFORE USING THIS PRODUCT IN ORDER TO ENSURE THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. EZVIZ SHALL NOT BE LIABLE IN THE EVENT THAT THIS PRODUCT IS USED WITH ILLEGITIMATE PURPOSES.

IN THE EVENT OF ANY CONFLICTS BETWEEN THE ABOVE AND THE APPLICABLE LAW, THE LATTER PREVAILS.

目錄

概覽	1
1. 包裝內容	1
2. 基本說明	1
取得 EZVIZ 應用程式	2
準備工作	3
1. 取下蓋子	3
2. 撕下絕緣條	3
新增裝置	3
1. 方法一：掃描 QR 代碼來新增	3
2. 方法二：透過閘道器新增	4
安裝	4
1. 1.8m 壁掛式安裝	4
2. 使用屏蔽罩（選配）	5
EZVIZ 應用程式上的操作	7
1. 首頁	7
2. 設定	7

概覽

1. 包裝內容



PIR 感測器 (x1)



屏蔽罩 (x1)



雙面膠帶 (x1)



頂針 (x1)



法規資訊 (x1)




快速入門指南 (x1)

i 僅帶有重設孔的裝置才隨附插銷。

2. 基本說明



名稱	說明
LED 指示燈	- 快速閃藍燈：偵測器進入裝置新增模式。 - 快速閃藍燈 3 下：變更工作模式。 - 亮藍燈 1 秒：PIR 訊號透過按下重設按鈕觸發 / 喚醒裝置 / 觸發撬動警報。
屏蔽罩	將其固定在鏡頭上以限制偵測範圍。

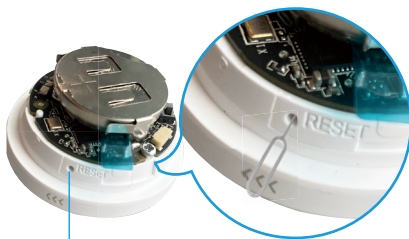

重設孔
結構 1 (帶有重設孔)



重設按鈕
結構 2 (帶有重設按鈕)

名稱	說明
重設孔 (重設按鈕)	使用插銷按住重設孔 2 秒 (如果您的裝置有重設按鈕, 請按住重設按鈕 5 秒以上), 然後裝置將進入裝置新增模式。 按兩下即可變更工作模式 (兩次按下之間的時間應小於 1 秒)。 • 節能模式開啟 (預設) 每 1 分鐘偵測一次物體。 • 節能模式關閉 / 偵錯模式 每 10 秒偵測一次物體。 * 網路連線成功後, 裝置進入偵錯模式; 5 分鐘後, 裝置自動進入節能模式。

取得 EZVIZ 應用程式

1. 將手機連線 Wi-Fi (建議)。
2. 在 App Store 或 Google Play™ 中搜尋「EZVIZ」, 下載並安裝 EZVIZ 應用程式。
3. 啟動應用程式並且註冊 EZVIZ 使用者帳戶。



i 如果您已經使用應用程式, 請確定其為最新版本。要找到是否有可用的更新, 請移至應用程式商店並搜尋 EZVIZ。

準備工作

1. 取下蓋子

逆時針轉動蓋子，將偵測器的蓋子取下，如下圖所示。



2. 撕下絕緣條

按住電池，然後撕下電池絕緣條。



結構 1（帶有重設孔）



結構 2（帶有重設按鈕）

- 撕下絕緣條後，在進行任何操作之前，請等待約 2-3 分鐘，這將使 PIR 偵測效能更加穩定。
- 當電池電量低時，低電池電量通知將推送到 EZVIZ 應用程式，用以提醒您更換電池。
- 如需更換電池，請購買 CR2450 620mAh 電池。
- 更換電池時，請正面朝上插入。
- 觸碰電路板時，雙手請保持乾燥且清潔。

新增裝置

- 偵測器應與 EZVIZ 智慧閘道器（以下簡稱「閘道器」）一起使用。請將閘道器新增到 EZVIZ Cloud，然後透過以下兩種方法將偵測器新增到閘道器。

1. 方法一：掃描 QR 代碼來新增

1. 透過 EZVIZ 應用程式登入您的帳戶，點選新增裝置圖示，隨即顯示 QR 碼掃描介面。
2. 掃描蓋子內側或使用手冊上的 QR 碼，然後將偵測器新增到閘道器。



3. 順時針旋轉蓋子，直到安裝指示標記和 EZVIZ 標誌對齊為止。

2. 方法二：透過閘道器新增

i 透過閘道器新增偵測器時，盡量將偵測器靠近閘道器置放。

1. 使閘道器按照閘道器使用手冊的指示進入裝置新增模式
2. 用插銷戳重設孔 2 秒左右（如果您的智慧按鈕有重設按鈕，而無重設孔，請按住重設按鈕 5 秒）直到偵測器上的指示燈變成快速閃藍燈，然後偵測器將進入新增模式。
3. 偵測器將自動新增到閘道器，且 LED 指示燈將熄滅。
4. 順時針旋轉蓋子，直到安裝指示標記和 EZVIZ 標誌對齊為止。

安裝

i 偵測器可放在桌子上，也可以透過偵測器底部的雙面膠帶貼在您想要的地方。以下安裝位置和角度僅供參考。

1. 1.8m 壁掛式安裝

i 為提升偵測效果，請將帶有安裝指示標記和 EZVIZ 標誌的一面朝向地面，如下圖所示。

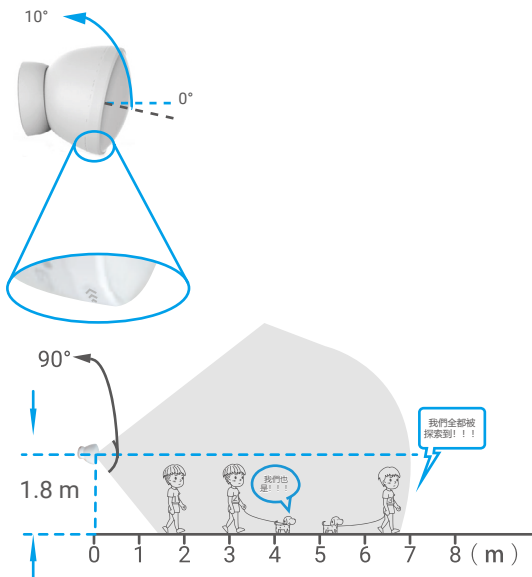


圖 1 偵測範圍側視圖

- 偵測器安裝完成後，需要調整偵測器的角度以得到合適的偵測範圍。
- 偵測器的偵測角度呈 90° 垂直和水平。
- 偵測器應面向人員經常走過的區域置放，且偵測器前方不應有障礙物。
- 請勿將偵測器安裝在烈陽直射或溫度變化很大的地方（靠近空調、冰箱、電風扇、烤箱、窗戶等等）。
- 在貼上偵測器之前，請先清潔表面。請勿將偵測器貼在用石灰粉刷過的牆壁上。

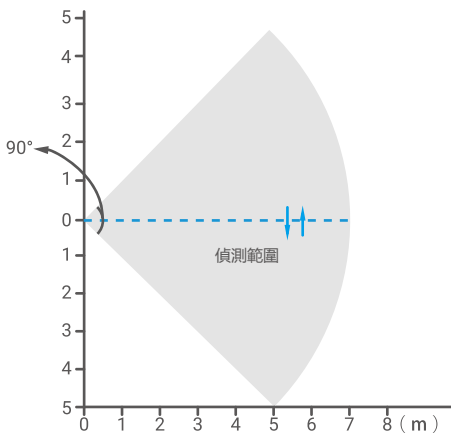


圖 2 偵測範圍俯視圖

2. 使用屏蔽罩（選配）

- 為提升偵測效果，請將帶有安裝指示標記和 EZVIZ 標誌的一面朝向地面，如下圖所示。

屏蔽罩可用於以下情況：

- 用來防止寵物所造成的假警報。

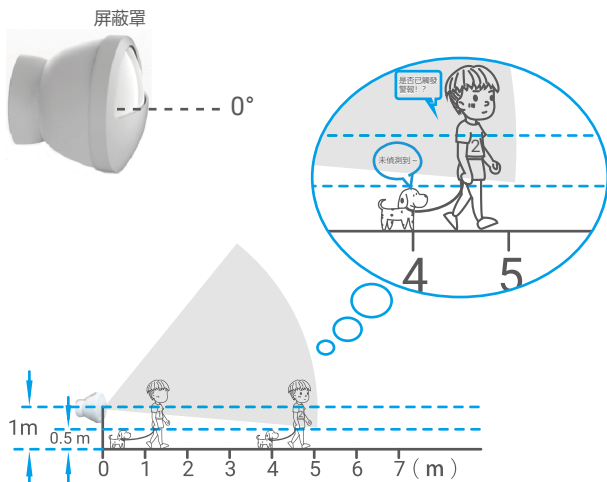


圖 1 偵測範圍側視圖

- 屏蔽罩會阻止偵測器之部分接收移動物體射出的熱輻射，從而限制偵測器的偵測範圍。這可防止尤其是寵物所造成的假警報。
- 如果有寵物，安裝高度 = 寵物高度 + 0.5m；如果寵物高度 $\leq 0.5\text{m}$ ，建議安裝高度為 1m。
- 使用屏蔽罩之後，偵測器的最大偵測距離為 5m。
- 期望偵測範圍小。

為提升偵測效果，請將帶有安裝指示標記和 EZVIZ 標誌的一面朝向地面，如下圖所示。

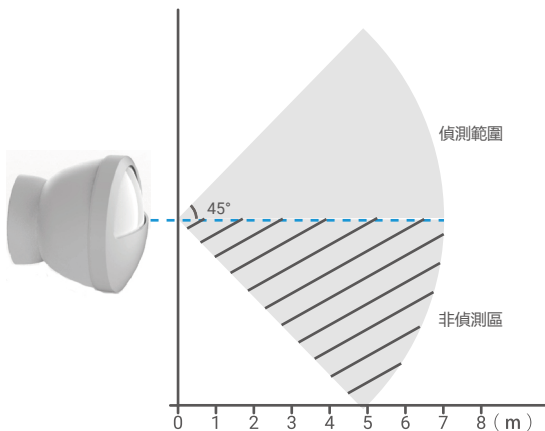


圖 2 偵測範圍俯視圖

EZVIZ 應用程式上的操作

 應用程式介面可能因版本更新而有所不同，以您手機安裝的應用程式介面為準。

1. 首頁

啟動 EZVIZ 應用程式，開啟相關閘道器的首頁，您可在頁面上根據需要管理偵測器。

Log (日誌)	偵測器的偵測日誌。
Dismiss (解除)	清除偵測器的警報。

2. 設定

參數	說明
Device Name (裝置名稱)	自訂裝置名稱。
Alarm Settings (警報設定)	您可以視需要設定通知參數。
Linkage Camera (連結攝影機)	選取要以連線至偵測器的攝影機。一旦連接，攝影機便將轉向發生人類偵測時的方向。
Energy-saving mode (節能模式)	按兩下即可變更工作模式(兩次按下之間的時間應小於 1 秒)。 • Factory Mode (出廠模式): 每 10 秒偵測一次物體。 • Energy-saving mode (節能模式): 每 1 分鐘偵測一次物體。
Related Devices (相關裝置)	您可看見連接到偵測器的閘道器。
Device Information (裝置資訊)	您可以在這裡檢視裝置資訊。
Share (分享)	分享您的裝置。
Delete Device (刪除裝置)	點選即可將偵測器從 EZVIZ Cloud 刪除。