

CH1 **Smart Wi-Fi Chime**


Boost the performance of your video doorbell

The CH1 chime is a steadfast ally for your existing EZVIZ battery doorbell. It creates pleasant ringtones to inform you of a visitor, and boosts Wi-Fi signal in a large house.

Designed for EZVIZ Battery-Powered Video Doorbells (EP3x Pro & More)¹







J 20 Notification Ringtones



لَتَ Dual Antennas



100-240V AC Power Supply



Simple Plug-In Installation







Amplify Wi-Fi signals for stable internet connection


With the CH1, your doorbell delivers steady performance with a stable network connection, even when it's installed outdoors and far from your home router with thick walls in between. Such enhancement is smartly done while optimizing the battery use of the connected video doorbell.

Know instantly when your visitors arrive

As soon as someone presses your EZVIZ doorbell at your front door, you will get a real-time audio notification from the CH1, even if your phone is out of reach. The chime reaches up to 72 dB with in a 1-meter radius², so you can hear the ring loud and clear.





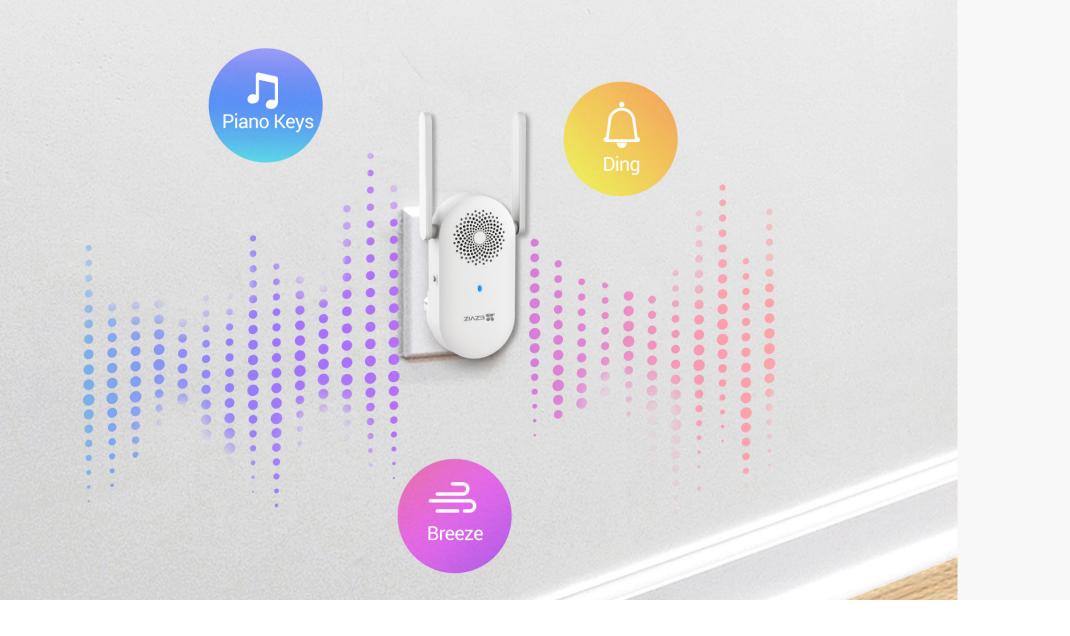

Find the perfect ring for your sweet home

No more ear-piercing sound to startle you! Choose from 20 custom tunes to please your ear. Feel free to adjust the volume to just the right level, or mute it when you don't want to be disturbed.

20 Notif

 \checkmark » Adjustable Volume

<u>Mute</u> C

1 The list will continue to grow as EZVIZ launches more compatible battery-powered video doorbell models in the near future.

2 Data from EZVIZ Lab's test results under standard conditions.

20 Notification Ringtones

Mute Option for Private Hours

Specifications Model CS-CH1-R100-10AWFK

Ringtone	Supports up to 20 options with adjustable volume
Audio Output	Built-in high-power speaker (Up to 72 dB in 1 meter)

Network

Protocol	EZVIZ Cloud Proprietary Protocol
Interface Protocol	EZVIZ Cloud Proprietary Protocol
Wi-Fi Standard	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4 GHz ~ 2.4835 GHz
Channel Bandwidth	Supports 20 MHz
Security	64 / 128-bit WEP, WPA / WPA2, WPA-PSK / WPA2-PSK
Transmission Rate	11b: 11 Mbps, 11g: 54 Mbps, 11n: 150 Mbps
Antennas	Dual external antennas

General

Operation Conditions

Dimensions

Package Dimensions

Power Consumption

Power Supply

Net Weight

Weight with Package

Reset button

-10°C to 45°C (14°F to 113°F) , humidity 95% or less (non-condensing)
101 × 64 × 32 mm (3.98 × 2.52 × 1.26 inch)
113 × 85 × 95 mm (4.45 × 3.35 × 3.74 inch)
Max. 5W
AC 100 ~ 240V
87 g (3.07 oz)
178 g (6.28 oz)
Yes

In the box

- CH1 Chime
- Quick Start Guide
- Regulatory Information



CE / WEEE / REACH / RoHS / UL

Specifications are subject to change without notice. " 🐉 ", " EZVIZ" and other trademarks and logos are the properties of EZVIZ in various jurisdictions.

www.ezviz.com