

# **TP7 2K**


## Smart Home Video Doorphone

#### An interconnected kit for a smarter home entrance

Meet the TP7, the exceptional kit of a smart doorphone, an easy keypad, and an advanced touch monitor that redefines front-door communication for modern smart living. You can now easily get in and out in a keyless way, and manage access for different visitors remotely. With all the useful features that your old intercom can hardly provide, the TP7 is stylish in design, easy to install and internet-connected to elevate your home security like never before.

7-Inch Color

Touch Screen

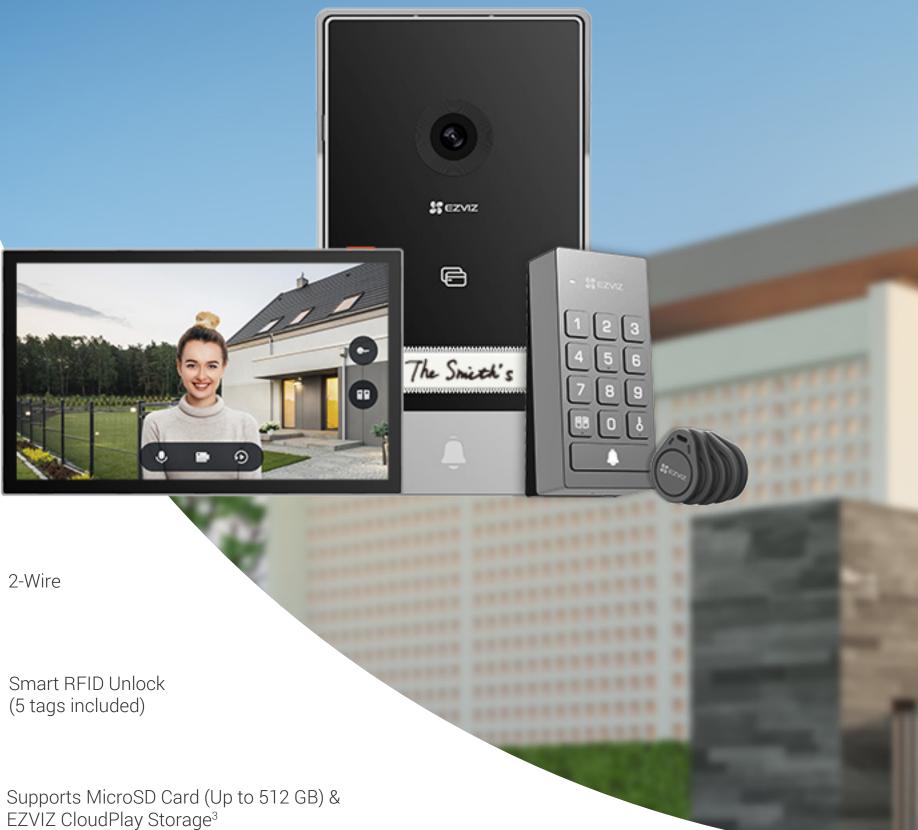



2K Resolution with IR Night Vision







Two-Way Talk (Supports voice changer feature)



Remote Door/Gate Unlock<sup>1</sup>

$\gamma \gamma$	
$\square$	





Built-In Doorbell with Multiple Ringtones




Weatherproof



Bluetooth Keypad Unlock



Supports 2.4 / 5 GHz Dual-Band Wi-Fi

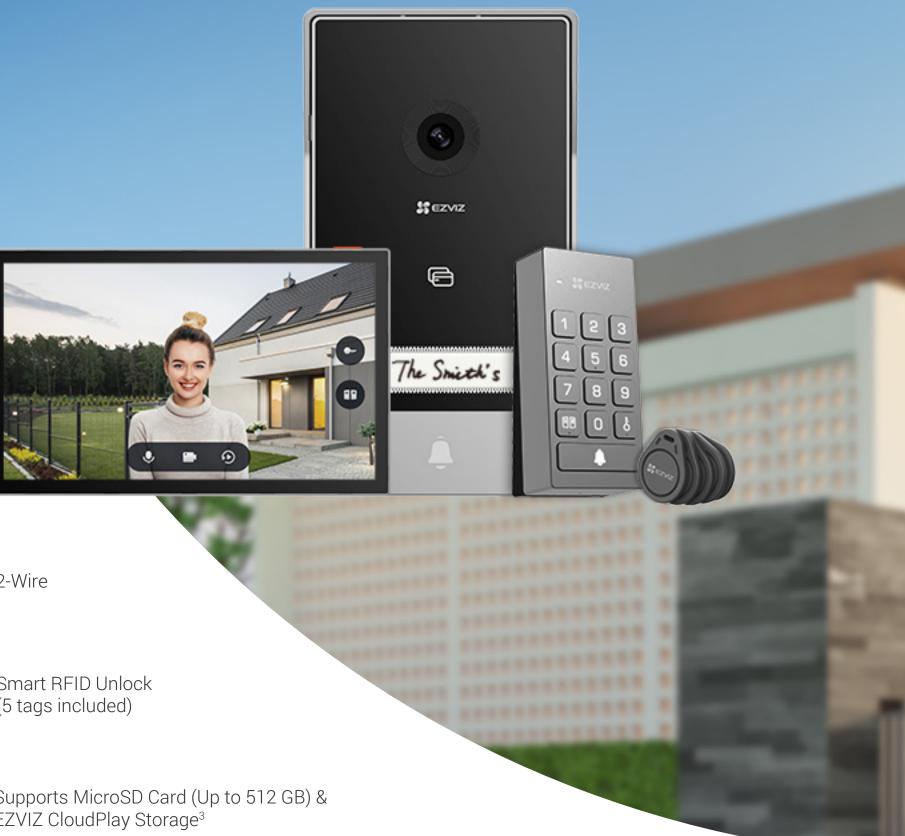



# Built to be reliable for houses and villas

The TP7 is a well-thought-out solution for those seeking instant communication and enhanced security in a spacious residence. From effortlessly opening a gate for family and friends and answering deliveries remotely, to safeguarding your front door with high-quality video and smart detection features, the TP7 satisfies much more needs than your old intercom system.



### Arriving home can be this easy

Entering your home is now faster and smoother than you'd imagine. Simply swipe open your door using a smart RFID card, or enter a passcode via the easy keypad. If you want to keep your pocket empty while out exercising, or if you are accidentally locked out of your house, the keypad ensures you can always get in easily.




Enter passcodes via the keypad

#### Hassle-free unlocking to welcome any guest

The TP7 makes it a lot easier to grant access to visitors, even if you're not home. You can either open the door for them remotely or create temporary passcodes or scannable QR codes for them to use on site - such features come in handy if you have a babysitter or dog walker that visits regularly.



Use temporary visitor codes

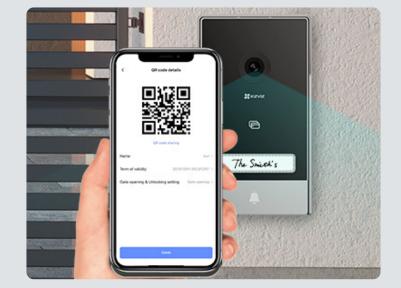

Scan a visitor QR code



Unlock via the indoor monitor



#### Swipe open with smart RFID (5 tags included)



Open the door using the EZVIZ App

#### Connect and control with an all-in-one touch screen

Operating as the main control panel, the 7-inch touch screen lets you customize your doorphone's settings, facilitates distant communications, and stores motion-triggered snapshots and video recordings. When the doorbell is pressed, the indoor screen will simultaneously light up to let you know who's outside.

#### Versatile features

Crisp live viewing Two-way talk Gate/Door unlock Video history and storage (Supports microSD card of up to 512 GB)

# It's easier than ever to respond from afar


Even if you're not home, the TP7 makes sure you don't miss a visitor. When responding to uninvited strangers, you can enable change the voice feature to keep yourself unidentified. Hi, you have a delivery.



Remote Unlock



Voice Changer for Privacy Protection

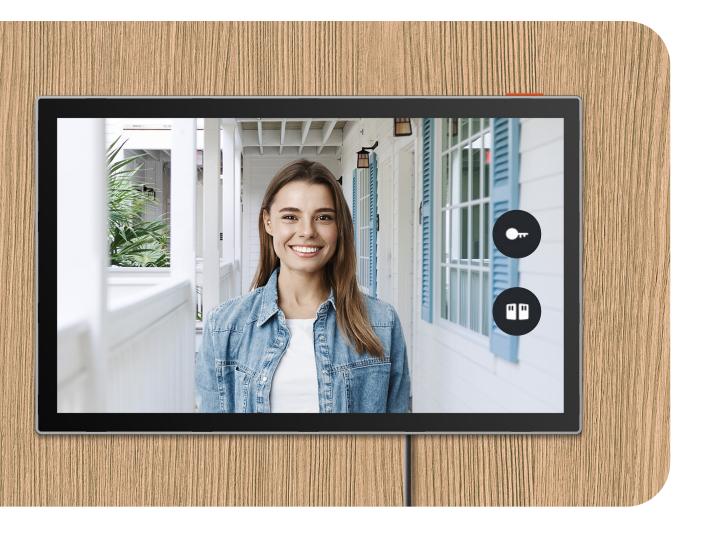



Thank you, please leave that outside the door.





#### Stay informed of important activities

The TP7 not only helps you see better, but also works proactively to protect your household. Whenever it detects human activity at your front door, it promptly sends out mobile alerts in case of any unauthorized trespassing. You can adjust the detection sensitivity and draw specific zones to avoid unnecessary messages.







**FREE** No Subscription Fee

# Capture details throughout the day

The TP7 offers sharp video coverage to watch over your property around the clock. With its wide 162-degree viewing angle and 2K lens, you clearly understand who's around and what's happening. Even in low-light conditions, the TP7 renders color night vision of up to 5 meters.



### Thoughtful features for additional convenience



Know the right door to knock with backlighted name cards (3 name cards included)

#### Extra-Large, safe storage options that you can trust

You can secure your recorded videos on a local microSD card of up to 512 GB, or subscribe to EZVIZ CloudPlay for fully-encrypted cloud storage<sup>3</sup>.



Supports MicroSD Card



Customize your pleasant ring with 20 different ringtone choices<sup>4</sup>



Supports EZVIZ CloudPlay Storage

### Elegant design elevates your front door

The TP7 presents a sleek design across its package of three devices. Setting itself apart from traditional intercom system, the TP7 fits the needs for a simple yet refined home setting. The indoor monitor screen optimizes its touch interface for user-friendly interaction.




#### Steady connection for boosted performance

To maximize the connected experience with remote controls, you can connect the indoor monitor to either the 2.4 or 5 GHz band. Enjoy strong Wi-Fi with lower latency, larger bandwidth, and a stable signal.





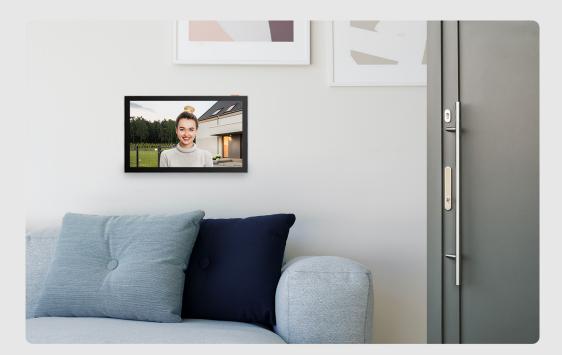

#### Enhanced viewing pleasure with smaller video files

Compared against the prevailing H.264 video compression technology, H.265 creates a more fluid viewing experience with recorded footage. Meanwhile, you won't have to worry about large video files taking up too much of your storage space – H.265 technology can reduce their sizes by up to 50%<sup>5</sup>.

#### We do our best to protect your data and privacy

We design the product to respectfully protect your data and privacy. You can also set up no filming zones to make sure recording only happens when it's appropriate and allowed.



EZVIZ has been awarded by DNV for information security (ISO/IEC 27001:2013), personal data protection (ISO/IEC 27701:2019), cloud security (CSA STAR) and more.





Privacy Zone<sup>6</sup>



**AES-128 Data Encryption** 

TLS **Data Transmission** Encryption

1 To check the installation requirements and product compatibility, please refer to the User Manual for detailed information.

2 Only the outdoor video doorphone and the keypad are weatherproof. The touch screen needs to be installed indoors.

3 Local storage cards must be purchased separately. Cloud storage service is only available in certain market regions. Please verify availability before making a purchase. 4 Users are able to customize the ringtone sent by the indoor display by touch controls or via the EZVIZ App. The outdoor doorbell only provides one default ringtone and cannot be customized. 5 Data from EZVIZ Lab's test results under standard conditions. Will vary with the frequency and complexity of the activity captured, and other environmental factors. 6 Users can draw in rectangles to customize up to 4 privacy zones.

# Specifications CS-TP7-R100-1W2TFC

#### **Outdoor Doorbell**

Image Sensor	1/2.7" Progressive Scan CMOS (Supports low light sensitivity)		Aud
Lens	2.0 mm @ F2.2,viewing angle: 162° (Diagonal)		Aud
Day & Night	IR-cut filter with auto-switching, 850nm infrared light x 2 (Max. 6 m)		Doo
Max. Resolution	2048 × 1296 (2K)		Nan
DNR	2D / 3D DNR		
Video Compression	H.265 / H.264		Terr
Frame Rate	Max.15 fps; Self-Adaptive during network transmission		
		, I	l

#### **Connection and Function**

Connection Method	Wired connection (2-wired, capable with 4-wired), Digital signal transmission	Intell
Transmission Distance	Φ 2 × 0.75mm², Max.50m Φ 2 × 1.5mm², Max.100m Twisted pair , Max.120m	Video
Open the door (Gate)	Supports 2 wiring ports. 1-10m distance. The intercom panel provides a dry-contact connection, without an electric current, to connect to the button for automated gate, gate breaking capacity: 12V/2A	<b>Gene</b> Opera
Unlock (Electric strike plate)	Supports 2 wiring ports. 1-10m distance. The electric strike plate or lock that you order must have a mechanical memory; the power supply to the electric strike plate or lock must not exceed 12V / 1.1A, other wise should do as user manual.	Ingre Size
Door Open Methods	1.RFID badge unlock (CPU card × 5 pcs) 2.Bluetooth keyboard unlock 3.App remote unlock 4.Indoor display unlock 5.QR Code unlock	

#### **Outdoor Doorbell Interface**

udio Input

udio Outpu

oorbell But

ame Card

erminal

#### Functions

elligent Al

nper Alarr

eo Interco

neral

eration Co

ress Prote

t	Built-in high-sensitivity microphone
ut	Built-in high-power speaker
itton	Supports 1 button. Can set the light on or off.
	Supports handwritten. 3 cards stickers included (1 sticker already on the intercom panel). Can set the light on or off.
	Two wiring ports to connect screen. Two wiring ports to connect gate. Two wiring ports to connect electric strike plate.

·		
larm	Smart human motion detection, Lingering Detection	
rm	Supports	
com	Long-distance video two-way talk	
onditions tection Grade	-30°C to 60°C , Humidity 95% or less (non-condensing) Waterproof, with shield cover	
	161 × 87 × 20mm	

# Specifications CS-TP7-R100-1W2TFC

Interior Display		Network Parameter	ſS
Display size	7" touch screen	Interface Protocol	EZVIZ Cloud Proprietary Protocol
Resolution	1024 × 600	Protocol	EZVIZ Cloud Proprietary Protocol
Interface		Function	
Audio Input	Built-in high-sensitivity microphone	Multiple Ringtones	Up to 20 ringtones
Audio Output	Built-in high-power speaker	Functions	Live view, Playback, Two-way talk, Video call
Button	Screen On/Off Button		
Terminal	Two wiring ports to connect 1 <sup>st</sup> outdoor doorbell. Two wiring ports to connect 2 <sup>nd</sup> outdoor doorbell.	General	
remina	Two wiring ports to connect extra interior screen (not include the kit)	Operation Conditions	-10°C to 45°C, Humidity 95% or less (non-condensing)
SD card	Device supports up to 512 GB	Weight	Net weight 855 g With package 1825 g
		Size	180 × 111 × 15 mm
Wi-Fi Parameters		Power Supply	DC 24V / 1A power supply, adaptor (100- 240Vac)
Wi Ei Standard	IFFF802 11b 802 11a 802 11b 802 11ac	Power Consumption	8W, Max. 24W

Wi-Fi Standard	IEEE802.11b, 802.11g, 802.11n, 802.11ac
Frequency Range	2.4GHz ~ 2.4835GHz 5.15GHz ~ 5.25GHz
Channel Bandwidth	Supports 20MHz
Security	64/128-bit WEP,WPA/WPA2,WPA-PSK/WPA2-PSK
Transmission Rate	11b: 11Mbps,11g: 54Mbps,11n: 150Mbps, 11ac:433.3Mbps

# Specifications CS-TP7-R100-1W2TFC

#### Bluetooth Keyboard

Panel Material	Metallic Aluminum
Dimensions	110 × 50 × 26.5mm
Weight	150g
Working Power	2 AA Alkaline Batteries
Working Temperature	-25°C ~ 70°C, 10%~95% Non-condensing
Working Humidity	IP65

#### Function

Password Unlocking	Supports (up to 5 groups, 6-10 bits can be set)
Anti-Pry Alert	Supports

# In the box

- Monitor
- Bluetooth Keypad
- Wall Bracket for Monitor
- Transformer for Monitor
- Intercom Panel (Doorbell) with a Weather-proof Shield
- Drill Template for Intercom Panel
- Drill Template for Monitor
- Ferrite Core
- Name Card (x2)
- AA Battery (x2)
- Pin (x1)
- Screwdriver
- Badges (x5)
- Screw Kit (x3)
- Regulatory Information (x2)
- Quick Start Guide

Specifications are subject to change without notice. " 🜮 ", " = zviz" and other trademarks and logos are the properties of EZVIZ in various jurisdictions.

## Certifications

CE / WEEE / RoHS / REACH