



CH1

Smart Wi-Fi Chime

* Compatible EZVIZ Video Doorbells models include DB2, DB2 Pro, DB2-B, DB2-B Pro and DB1.

Create a better ring for your smart home

Optimize your EZVIZ doorbell with the thoughtfully-designed indoor chime. The CH1 blends with style into any room in your home. Customize the CH1 with the flexible audio tone options that best suit your vibe.

 Built-In Loud Speaker
(Up to 72 dB within 1-meter range¹)

 20 Notification Ringtones

 Adjustable Volume

 Dual Antennas


 Simple Plug-In Installation

 Compact Design



Know instantly when your visitors arrive

As soon as someone presses your EZVIZ doorbell at your front door, you will get a real-time audio notification from the CH1, even if your phone is out of reach. The chime reaches up to 72 dB with in a 1-meter radius, so you can hear the ring loud and clear.

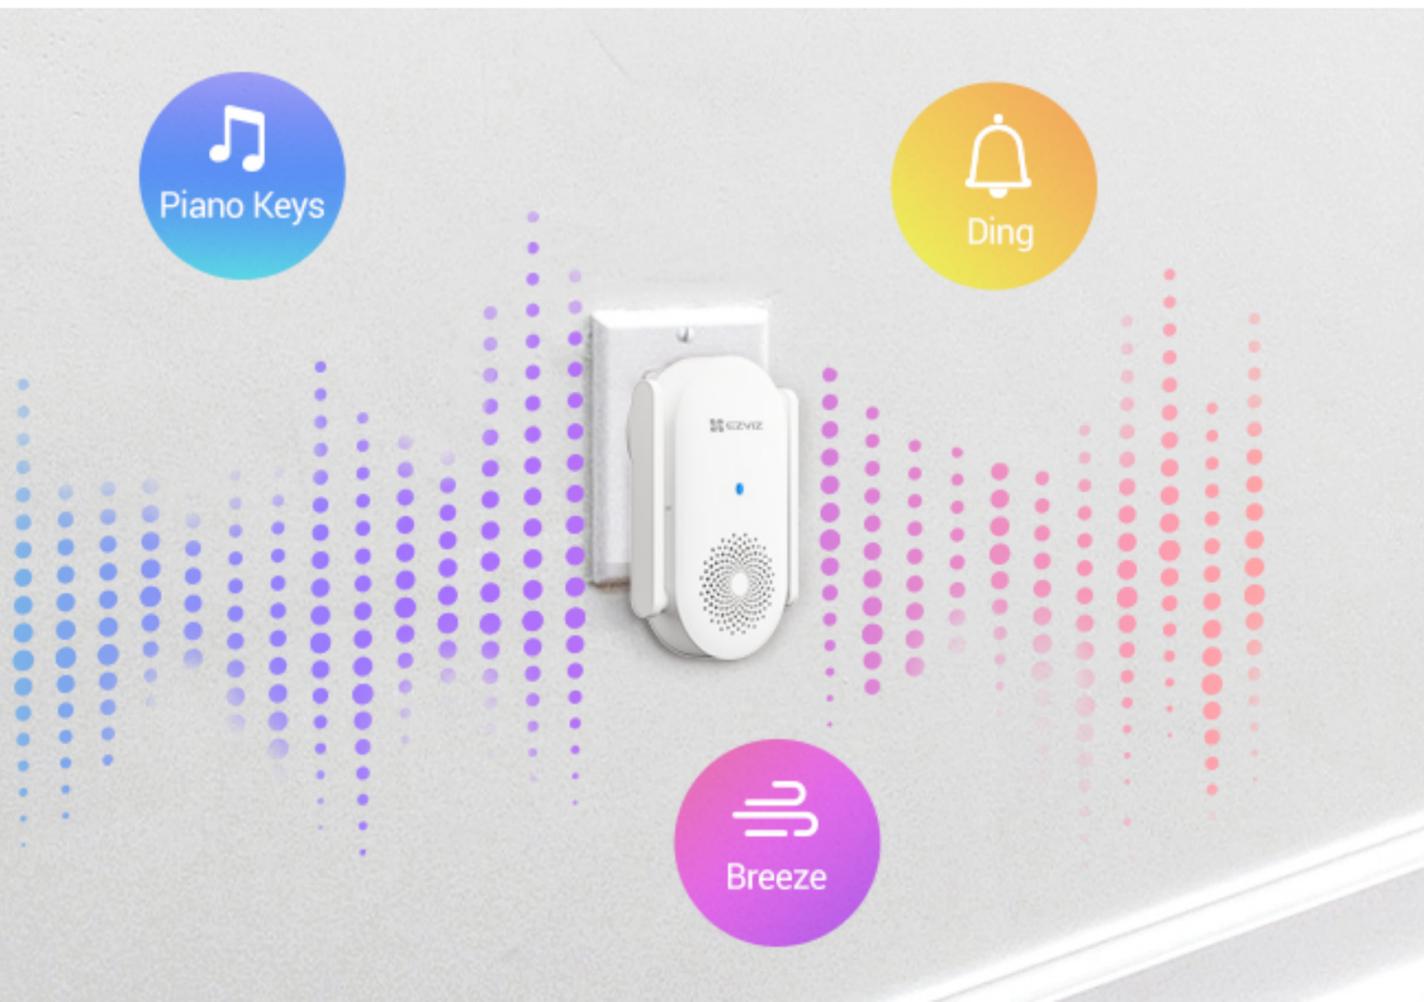


Find the perfect ring for your sweet home

No more ear-piercing sound to startle you! Choose from 20 custom tunes to please your ear. Feel free to adjust the volume to just the right level, or mute it when you don't want to be disturbed.

-  20 Notification Ringtones
-  Adjustable Volume
-  Mute Option for Private Hours

Hear every ring, in every room

In bigger homes, place multiple chimes in different areas – from the living room to the hallway, bedrooms, and basement – to amplify coverage. This way, you won't miss a single visitor even when you're far from the door.

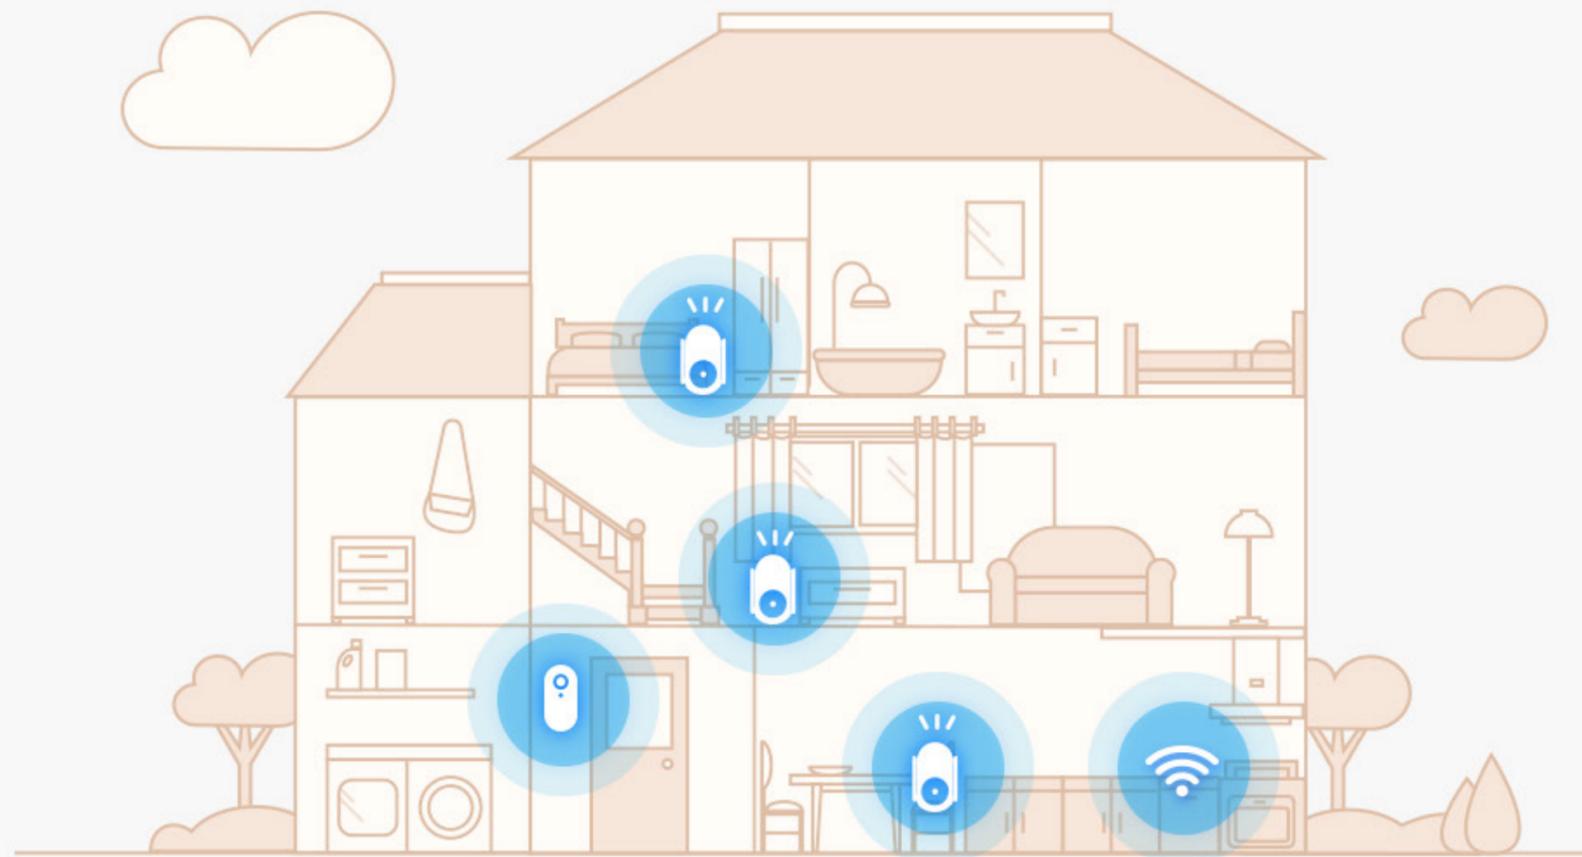

A perfect companion for a boosted connection

The chime also works as an internet booster to better keep your EZVIZ battery doorbell online – which many other wireless doorbells struggle with.

1 Data from EZVIZ Lab's test results under standard conditions.

Specifications Model CS-CH1-A0-10AWFK

Audio

Ringtone	Supports up to 20 options with adjustable volume
Audio Output	Built-in high-power speaker (Up to 72 dB in 1 meter)

Network

Protocol	EZVIZ Cloud Proprietary Protocol
Interface Protocol	EZVIZ Cloud Proprietary Protocol
Wi-Fi Standard	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4 GHz ~ 2.4835 GHz
Channel Bandwidth	Supports 20 MHz
Security	64 / 128-bit WEP, WPA / WPA2, WPA-PSK / WPA2-PSK
Transmission Rate	11b: 11 Mbps, 11g: 54 Mbps, 11n: 150 Mbps
Antennas	Dual external antennas

General

Operation Conditions	-10°C to 45°C (14°F to 113°F) , humidity 95% or less (non-condensing)
Dimensions	101 × 64 × 32 mm (3.98 × 2.52 × 1.26 inch)
Package Dimensions	113 × 85 × 95 mm (4.45 × 3.35 × 3.74 inch)
Power Consumption	Max. 5W
Power Supply	AC 100 ~ 240V
Net Weight	87 g (3.07 oz)
Weight with Package	178 g (6.28 oz)
Reset button	Yes

In the box

- CH1 Chime
- Quick Start Guide
- Regulatory Information

Certifications:

UL / FCC / CE / WEEE / REACH / RoHS

Specifications are subject to change without notice. "EZVIZ" and other trademarks and logos are the properties of EZVIZ in various jurisdictions.

<http://ezviz.com>