COPYRIGHT © Hangzhou EZVIZ Software Co., Ltd. ALL RIGHTS RESERVED.
Any and all information, including, among others, wordings, pictures, graphs are the properties of Hangzhou EZVIZ Software Co., Ltd. (hereinafter referred to as "EZVIZ"). This user manual (hereinafter referred to as "the Manual") cannot be reproduced, changed, translated, or distributed, partially or wholly, by any means, without the prior written permission of EZVIZ. Unless otherwise stipulated, EZVIZ does not make any warranties, guarantees or representations, express or implied, regarding to the Manual.

About this Manual

The Manual includes instructions for using and managing the product. Pictures, charts, images and all other information hereinafter are for description and explanation only. The information contained in the Manual is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version in the EZVIZ ™ website (http://www.ezviz.com).

Revision Record

New release - October, 2026

Trademarks Acknowledgement

EZVIZ ™, ™, and other EZVIZ's trademarks and logos are the properties of EZVIZ in various jurisdictions. Other trademarks and logos mentioned below are the properties of their respective owners.

Legal Disclaimer

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, IS PROVIDED "AS IS", WITH ALL FAULTS AND ERRORS, AND EZVIZ MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY. IN NO EVENT WILL EZVIZ, ITS DIRECTORS, OFFICERS, EMPLOYEES, OR AGENTS BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA OR DOCUMENTATION, IN CONNECTION WITH THE USE OF THIS PRODUCT, EVEN IF EZVIZ HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL EZVIZ'S TOTAL LIABILITY FOR ALL DAMAGES EXCEED THE ORIGINAL PURCHASE PRICE OF THE PRODUCT.

EZVIZ DOES NOT UNDERTAKE ANY LIABILITY FOR PERSONAL INJURY OR PROPERTY DAMAGE AS THE RESULT OF PRODUCT INTERRUPTION OR SERVICE TERMINATION CAUSED BY: A) IMPROPER INSTALLATION OR USAGE OTHER THAN AS REQUESTED; B) THE PROTECTION OF NATIONAL OR PUBLIC INTERESTS; C) FORCE MAJEURE; D) YOURSELF OR THE THIRD PARTY, INCLUDING WITHOUT LIMITATION, USING ANY THIRD PARTY'S PRODUCTS, SOFTWARE, APPLICATIONS, AND AMONG OTHERS.

REGARDING TO THE PRODUCT WITH INTERNET ACCESS, THE USE OF PRODUCT SHALL BE WHOLLY AT YOUR OWN RISKS. EZVIZ SHALL NOT TAKE ANY RESPONSIBILITES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER ATTACK, HACKER ATTACK, VIRUS INSPECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, EZVIZ WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED. SURVEILLANCE LAWS AND DATA PROTECTION LAWS VARY BY JURISDICTION. PLEASE CHECK ALL RELEVANT LAWS IN YOUR JURISDICTION BEFORE USING THIS PRODUCT IN ORDER TO ENSURE THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. EZVIZ SHALL NOT BE LIABLE IN THE EVENT THAT THIS PRODUCT IS USED WITH ILLEGITIMATE PURPOSES.

IN THE EVENT OF ANY CONFLICTS BETWEEN THE ABOVE AND THE APPLICABLE LAW, THE LATTER PREVAILS.

Table of Contents

Overview 1
1. Package Contents 1
2. Basics 1

Get the EZVIZ App 3

Connect to Power 3

Add Camera to EZVIZ App 3
1. Option A: Wired Connection 3
2. Option B: Wi-Fi Connection 4

Set Up Matter (Optional) 5

Installation 5
1. Install a microSD™ Card (Optional) 5
2. Choose an Installation Location 5
3. Remove the Mounting Bracket 6
4. Install the Camera 6
5. Install the Waterproof Kit (Optional) 8

View Your Device 9
1. Live View 9
2. Intelligent Detection Settings 10

EZVIZ Connect 11
1. Use Amazon Alexa 11
2. Use Google Assistant 12

FAQ 13

Initiatives on the Use of Video Products 14

Overview

1. Package Contents

Camera (×1)



Drill Template (×1)

Waterproof Kit (×1)

Screw Kit (×1)

Power Adapter (×1)

Regulatory Information (×1)

Quick Start Guide (×1)

The power adapter's appearance is subject to the one you have bought.

2. Basics

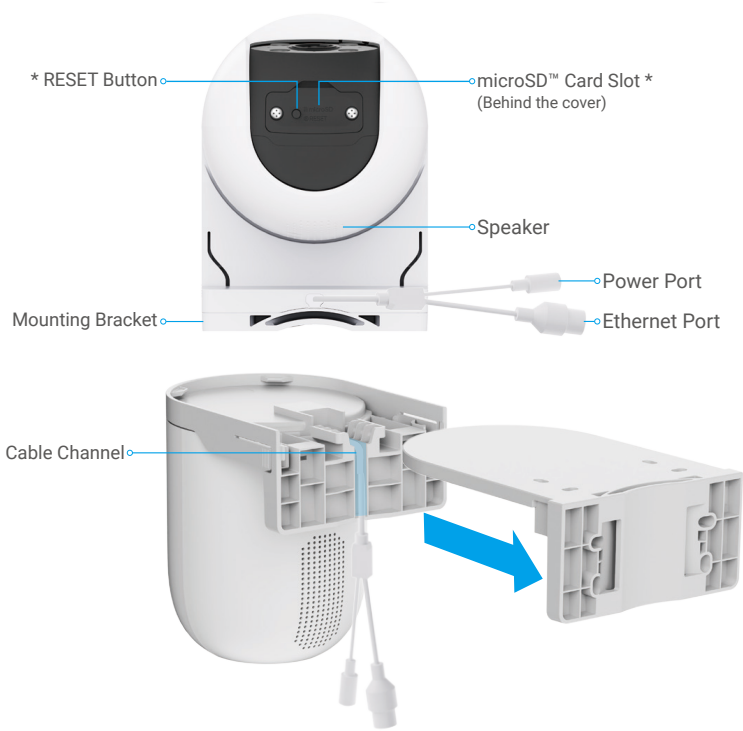

Remove the Mounting Bracket

Name	Description
Red / Blue Lights	• Alarm After adding the camera to EZVIZ app, you can enable alarm on the camera's live view page. The camera will sound an alarm, while the spotlights flash and the red / blue lights flash in red and blue alternately. • Intelligent Detection After adding the camera to EZVIZ app, you can enable the intelligent detection (for details, refer to the "Intelligent Detection Settings"). When an alarm is triggered, the camera will produce corresponding audible and visual alarms based on the parameters set in the "Light Settings". ⓘ To ensure the spotlights and red/blue lights function properly for intelligent detection scenarios, enable the corresponding lights in EZVIZ app under "Settings > Light Settings".
LED Indicator	Solid Red: Camera starting up.
	Slow-flashing Red: Network exception.
	Fast-flashing Red: Camera exception (e.g. microSD™ card error).
	Solid Blue: Video being viewed in the EZVIZ app.
	Slow-flashing Blue: Camera running properly.
	Fast-flashing Blue: Camera ready for network configuration.
RESET Button	When the camera is working, press and hold the button for 5 seconds to restart and set all parameters to default.
microSD™ Card Slot	• Insert a microSD™ card (purchase separately) into the card slot. Initialize the card in the EZVIZ app before using it. • Recommended compatibility: Class 10, maximum space 512GB.

Get the EZVIZ App

Before downloading the app:
- If the app is already installed, verify that it is the latest version by checking for updates in your app store.
- If the app is not installed, follow the steps below to download it.

1. Connect your mobile phone to Wi-Fi (suggested).
2. Download the EZVIZ app by searching "EZVIZ" in the App Store or Google Play™.
3. Register an EZVIZ account and log in to the app.

EZVIZ App	
Download on the App Store	GET IT ON Google Play

Connect to Power

Connect the power port to a power outlet with the power adapter (included in the package). When the LED indicator is fast-flashing blue, it indicates that the startup process is completed and the device is ready for network configuration.

- It is recommended to use the power adapter included in the package.
- For disconnection from power supply, unplug the power connector from the device.

Add Camera to EZVIZ App

Connect the camera to a wired or Wi-Fi network, then add it to the EZVIZ app.
- Wired connection: connect the camera to a router. Refer to "Option A: Wired Connection".
- Wi-Fi configuration: configure Wi-Fi settings. Refer to "Option B: Wi-Fi Connection".

Network Priority: Wired network > Wi-Fi.

1. Option A: Wired Connection

1. Connect the camera to a LAN port of your router using an Ethernet cable (purchase separately).

When the LED indicator turns slow-flashing blue, it indicates that the camera has been connected to the Internet.

2. Log in to your EZVIZ app.
3. On the Home screen, tap "+" in the upper-right corner to go to the Scan QR Code page.
4. Scan the QR code on the quick start guide cover, or scan the one on the top of the device after removing the mounting bracket.

For detailed instructions on removing the bracket, please refer to "Remove the Mounting Bracket".

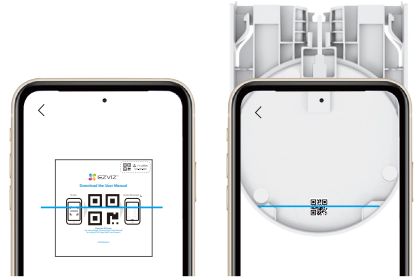

5. Follow the EZVIZ app wizard to add the camera.

- If the LED indicator turns slow-flashing red, it indicates that the camera has failed to connect to the network. Please check that the network cable is securely plugged in, or replace it with a new Ethernet cable and try again.
- To switch to Wi-Fi network, please remove the Ethernet cable and then refer to "Option B: Wi-Fi Connection".

2. Option B: Wi-Fi Connection

1. Log in to your EZVIZ app.
2. On the Home screen, tap "+" in the upper-right corner to go to the Scan QR Code page.
3. Scan the QR code on the quick start guide cover, or scan the one on the top of the device after removing the mounting bracket.

For detailed instructions on removing the bracket, please refer to "Remove the Mounting Bracket".

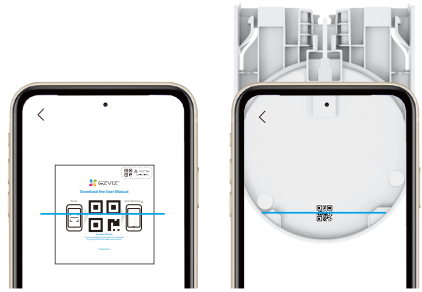

4. Follow the EZVIZ app wizard to complete Wi-Fi configuration and add the camera.

- Please connect your camera to the Wi-Fi to which your mobile phone has been connected.
- To reconfigure your camera's Wi-Fi, please press and hold the RESET button for about 5 seconds, then repeat the steps above.

Set Up Matter (Optional)

You can also add the device to a third-party Matter-supported app for more control options. Follow the steps below:

1. Open the Matter-supported app.
2. Follow the app wizard, scan the Matter Setup Code on the quick start guide cover or on the top of the device after removing the mounting bracket, or enter the numeric setup code on the quick start guide cover.

For detailed instructions on removing the bracket, please refer to "Remove the Mounting Bracket".

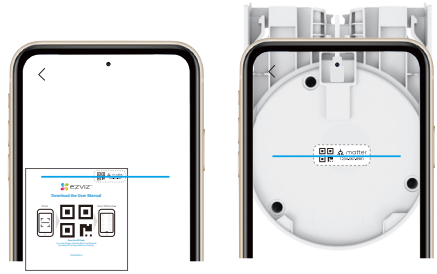

3. Follow the wizard to add your device to the app.
4. Once setup is complete, the device will appear in your app.

Please keep the Matter Setup Code for future reference.

Installation

1. Install a microSD™ Card (Optional)

1. Remove the two screws on the bottom of the device to detach the cover.
2. Insert a microSD™ card (purchase separately) into the card slot.
3. Reattach the cover and tighten the screws.

After installing a microSD™ card, please follow the steps below to initialize the card in the EZVIZ app before using it.
1. In the EZVIZ app, tap "Record List" in the device Settings page to check the microSD™ card status.
2. If the microSD™ card status shows as "Uninitialized", tap to initialize it. The status will then change to "In Use", allowing videos to be stored.

2. Choose an Installation Location

- Choose a location with a clear, unblocked field of view and good wireless network signal coverage.
- Camera cannot be installed with the lens facing direct sunlight.
- Recommended installation height: 8.2 - 9.8 feet (2.5 - 3 meters) above the ground.

3. Remove the Mounting Bracket

Press the locking tabs on both sides of the device body, while gently pulling the mounting bracket outward to release it.

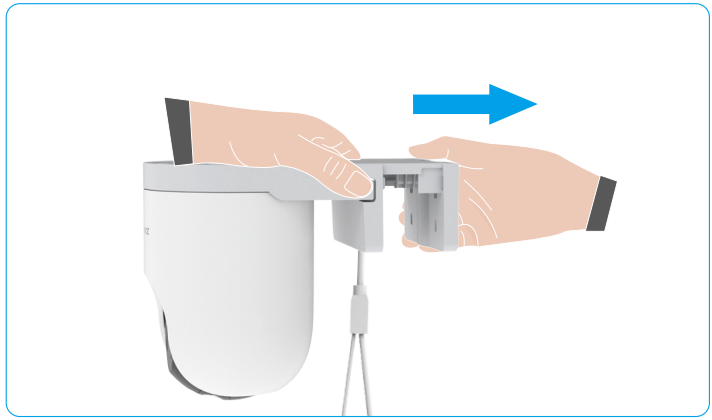

4. Install the Camera

The camera can be wall mounted, ceiling mounted, and pole mounted.

Ceiling/Wall Mount

Make sure the wall is strong enough to withstand three times the weight of the camera.

1. Stick the drill template onto a clean and flat surface.
2. (For cement ceiling/wall only) Drill screw holes according to the template, and insert anchors.
3. Use screws (PA4×25) to fix the mounting bracket on the installation surface.
4. Install the camera onto the mounting bracket. Before installing the camera onto the mounting bracket, route all cables through the cable channel to prevent interference with subsequent installation steps.

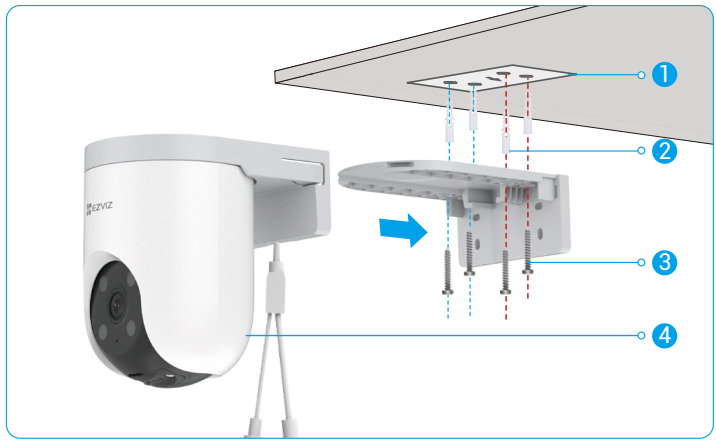

Fig. 1 Ceiling Mount

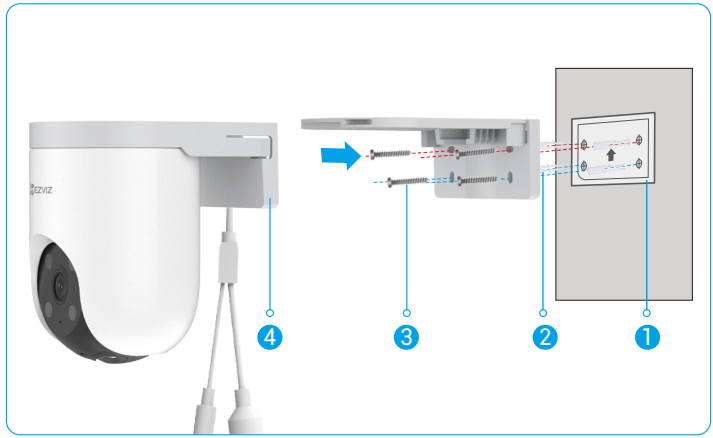

Fig. 2 Wall Mount

Pole Mount

1. Use a hoop (purchase separately) to fix the mounting bracket to a pole.
2. Install the camera onto the mounting bracket. Before installing the camera onto the mounting bracket, route all cables through the cable channel to prevent interference with subsequent installation steps.

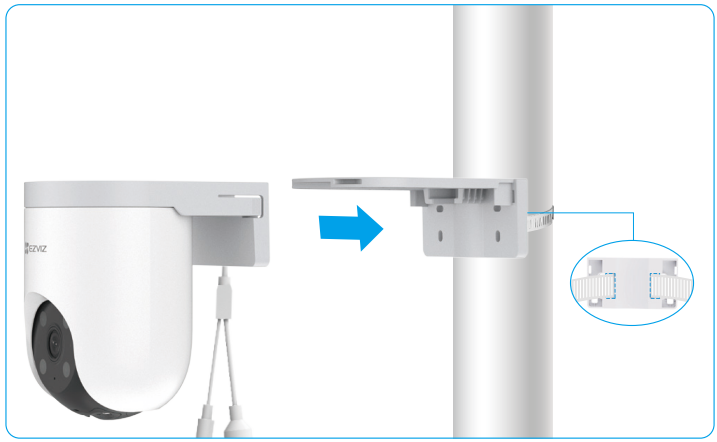

After installation, please remove the protective film from the lens.

5. Install the Waterproof Kit (Optional)

If the camera is installed outdoors or in humid environments, please use the waterproof kit.

1. Insert the washer into the Ethernet port of the camera.



2. Thread A through the endcap, the gasket and the nut.

3. Thread A into the Ethernet port of the camera.

4. Tighten the nut, the gasket and the endcap.

5. Connect B to a LAN port of the router.

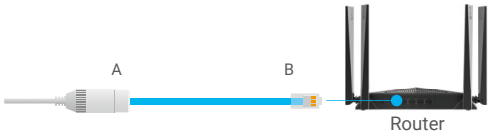

View Your Device

The app interface may change due to version update.

1. Live View

When you launch the EZVIZ app, the device page displays as shown below.You can view and listen to a live feed, take snapshots or recordings, and choose video definition as needed.

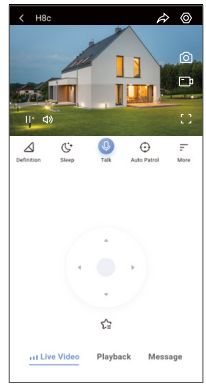

Swipe left and right across the screen to see more icons.

Icon	Description
	Share. Share your device with anyone you want.
	Settings. View or change the device settings.
	Snapshot. Take a snapshot.
	Record. Manually start/stop recording.
	Full Screen. Tap to enjoy a full screen display for your field of view.
	PTZ. Rotate the camera to get broader field of view.
	Favorite Location. Tap the icon to save the current camera position as a favorite for quick access later.
	Definition. Tap to select a video resolution.
	Sleep. Tap to enable sleep mode, the video will stop displaying and the alarm notification will be turned off.
	Talk. Tap to talk with the people in front of the camera.
	Auto Patrol. Tap to enable an automatic patrol and track the target.
	360° Picture. Tap to generate a 360 degree view picture.
	Alarm. Tap the icon, and the device will make sounds and flash to deter intruders.
	Floodlight. Tap to turn on the floodlight to light up the field of view, and tap it again to turn it off.
	Nearby Device. Tap to select available nearby devices for multi-screen live view.
	PiP. View the video displayed on top of another app you are using.
	Tip. Tap to see more information about the device.
	Rearrange. Rearrange the sequence of all the functions above.

2. Intelligent Detection Settings

The device supports intelligent detection. Please follow the steps below to configure it.

1. Go to device "Settings > Intelligent Detection".
2. Tap "Apply" to enable the specific AI algorithms for your device.

3. After completing the intelligent detection settings, return to the device settings page. Tap "Light Settings" to enable corresponding light notifications, and "Audio Settings" to enable audio settings as needed.

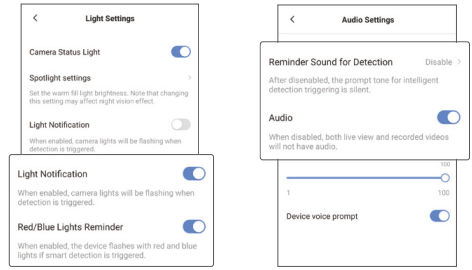

The camera will produce corresponding audible and visual notifications based on the parameters set in the "Light Settings" and "Audio Settings" under the following conditions:

- A human shape is detected in the live view (if "Human Shape Detection" is enabled).
- A vehicle is detected in the live view (if "Vehicle Detection" is enabled).
- A dynamic change is detected in the live view (if "Image Change Detection" is enabled).
- A person or vehicle is detected in the designated area (if "Out of Zone Detection" is enabled).
- A person or vehicle is detected entering a designated area (if "Intrusion Detection" is enabled).
- A person or vehicle is detected crossing a predefined boundary (if "Line-crossing Detection" is enabled).

EZVIZ Connect

1. Use Amazon Alexa

These instructions will enable you to control your EZVIZ devices with Amazon Alexa. If you run into any difficulties during the process, please refer to Troubleshooting.

Before you start, make sure that:

1. EZVIZ devices are connected to the EZVIZ app.
2. In the EZVIZ app, turn off the "Video Encryption" and turn on the "Audio" in the Device Settings page.
3. You have an Alexa-enabled device (i.e Echo Spot, Echo-Show, All-new Echo-Show, Fire TV (all generations), Fire TV stick (second generation only), or Fire TV Edition smart TVs).
4. The Amazon Alexa app is already installed on your smart device, and you have created an account.

To Control EZVIZ devices with Amazon Alexa:

1. Open the Alexa app and select "Skills and Games" from the menu.
2. On the Skills and Games screen, search for "EZVIZ", and you will find "EZVIZ" skills.
3. Select your EZVIZ device's skill, then tap "ENABLE TO USE".
4. Enter your EZVIZ username and password, and tap "Sign in".
5. Tap the Authorize button to authorize Alexa to access your EZVIZ account, so that Alexa can control your EZVIZ devices.
6. You will see "EZVIZ has been successfully linked", then tap "DISCOVER DEVICES" to allow Alexa to discover all your EZVIZ devices.
7. Go back to Alexa app menu and select "Devices", and under devices you will see all your EZVIZ devices.

Voice Command

Discover a new smart device via the "Smart Home" menu in the Alexa app or the Alexa Voice Control function.
Once the device is found, you can control it with your voice. Speak simple commands to Alexa.

Your device's name for example: "show xxxx camera," can be changed in the EZVIZ app. Each time you change the name of the device, you will need to discover the device again to update the name.

Troubleshooting

What should I do if Alexa fails to discover my device?

Check if there are any Internet connecting problems.
Restart the smart device and re-discover on Alexa.

Why the device's status is "Offline" on Alexa?

Your device might have been disconnected from the network. Restart the smart device and re-discover on Alexa.
Check if your router is connected to the Internet and try again.

For details about countries where Amazon Alexa is available, see Amazon Alexa's official website.

2. Use Google Assistant

With the Google Assistant, you can activate your EZVIZ device and watch live by speaking Google Assistant voice commands.

The following devices and apps are required:

1. A functional EZVIZ app.
2. In the EZVIZ app, turn off the "Video Encryption" and turn on the "Audio" in the Device Settings page.
3. A TV with functional Chromecast connecting to it.
4. The Google Assistant app on your phone.

To get started, follow the steps below:

1. Set up the EZVIZ device and make sure it works properly on the app.
2. Download the Google Home app from the App Store or Google Play™ and log into your Google account.
3. On the Myhome screen, tap "+" in the upper-left corner, and select "Set up device" from the menu list to go to the Set up interface.
4. Tap "Works with Google", and search for "EZVIZ", where you will find "EZVIZ" skills.
5. Enter your EZVIZ username and password, and tap "Sign in".
6. Tap the Authorize button to authorize Google to access your EZVIZ account, so that Google can control your EZVIZ devices.
7. Tap "Return to app".
8. Follow the above steps to complete the authorization. When synchronization is completed, EZVIZ service will be listed under your list of services. To see a list of compatible devices under your EZVIZ account, tap on the EZVIZ service icon.
9. Now try some commands. Use the name of the camera that you created when you set up the system.

Users can manage devices as a single entity or in a group. Adding devices to a room allows users to control a group of devices at the same time using one command.

See the link for more information:

https://support.google.com/googlehome/answer/7029485?co=GENIE.Platform%3DAndroid&hl=en

FAQ

Q: If the camera is offline, will the video recording continue?

A: If the camera is powered on but disconnected to the Internet, then video recording on microSD™ card will continue but cloud recording will stop. If the camera is powered off, both video recordings will stop.

Q: What if I forget my password?

A: Please go to the login page in the EZVIZ app and tap on "Forgot password?" Then, enter your account's email address or phone number and tap "Send". After receiving the verification code, enter the code and reset your password.

Q: Why can't I receive my verification code?

A:
1. If you registered the account via email, please check your junk mail. If you still can't receive the verification code, you might have email filter/block restricting this email, please check with your email provider.
2. If you registered an account via mobile number, please confirm whether your mobile can receive SMS short codes or not.
3. If you still haven't received the verification code, please provide your number, your country, time of request to the support center at support@ezviz.com or contact your regional support team.

Q: What should I do if Wi-Fi configuration failed?

A: Please check the following settings:
1. Ensure that your mobile phone is connected to the Wi-Fi and the Wi-Fi network is working properly.
2. Check the network condition:
   - Make sure your network has no firewall or other limits.
   - Ensure the router can distribute IP address to your device or disable the static IP setting (DHCP is enabled by default on all EZVIZ devices).
3. Reset the camera and ensure the camera is in Wi-Fi configuration mode, and then complete the device setup on EZVIZ app.

Q: How to get the device verification code (6 capital letters)?

A: Please note that for most EZVIZ devices, usually there are two ways to get the 6 capital letters device verification code:

- For most of the models, you can find it on the device sticker/label of the EZVIZ device;
- Alternatively, you can also find the verification code in device "Settings > Device Information > Verification Code".

i For additional information about the device, please refer to www.ezviz.com.

Initiatives on the Use of Video Products

Dear Valued EZVIZ Users,

Technology affects every aspect of our life. As a forward-looking tech company, we are increasingly aware of the role technology plays in improving efficiency and quality of our life. At the same time, we are also aware of the potential harm of its improper usage. For example, video products can record real, complete and clear images, therefore they hold great values in representing facts. Nevertheless, improper distribution, use and/or processing of video records may infringe on the privacy, legitimate rights and interests of others.

Committed to innovating technology for the good, we at EZVIZ hereby earnestly advocate that every user shall use video products properly and responsibly, thus to collectively create a positive environment where all related practices and usage comply with applicable laws and regulations, respect individuals' interests and rights, and promote social morality.

Here are EZVIZ's initiatives that we'd appreciate your attention:

1. Each individual possesses a reasonable expectation of privacy, and the use of video products should not be in conflict with such reasonable expectation. Therefore, a warning notice which clarifies the monitoring range should be displayed in a reasonable and effective manner, when installing video products in public areas. For non-public areas, the rights and interests of people involved shall be evaluated thoughtfully, including but not limited to, installing video products only after obtaining the consent of the stakeholders, and not installing highly-invisible video products without other's knowledge.
2. Video products objectively records footage of real activities within specific time and space. Users shall reasonably identify the people and rights involved in this scope in advance, to avoid any infringement of portrait, privacy or other legal rights of others while protecting themselves through video products. Notably, if you choose to enable the audio recording function on your camera, it will capture sounds, including conversations, within the monitoring range. We highly recommend a comprehensive assessment on the potential sound sources in the monitoring range, so as to fully understand the necessity and the reasonableness before you turn on the audio recording function.
3. Video products in use will consistently generate audio or visual data from real scenes-possibly including biometric information such as facial images-based on the user's selection of product features. Such data can be used or processed to use. Video products are only technological tools that do not and cannot humanly practice legal and moral standards to guide lawful and proper use of data. It is the methods and purposes of the people who control and use the generated data that make a difference. Therefore, data controllers shall not only strictly abide by applicable laws and regulations, but also fully respect non-obligatory rules including international conventions, moral standards, cultural norms, public order and local customs. Furthermore, we should always prioritize the protection of privacy and portrait rights, and other reasonable interests.
4. The video data continuously generated by video products carries the rights, values and other demands of various stakeholders. Thus, it is extremely crucial to ensure data security and shield the products from malicious intrusions. Every user and data controller shall, undertake all reasonable and necessary measures to maximize product and data security, avoiding data leakage, improper disclosure or misuse, including but not limited to, setting up access control, selecting a suitable network environment where video products are connected, establishing and constantly optimizing network security.
5. Video products have made great contributions to enhance the safety of our society, and we believe that they will continue to play a positive role in various aspects of our daily life. Any attempt to abuse these products to violate human rights or engage in unlawful activities contradicts the very essence of the value in tech innovation and product development. We encourage every user to establish your own methods and rules to evaluate and monitor the use of video products, so as to ensure that these products are always used properly, thoughtfully and with goodwill.