

COPYRIGHT © Hangzhou EZVIZ Software Co., Ltd.. ALL RIGHTS RESERVED. Any and all information, including, among others, wordings, pictures, graphs are the properties of Hangzhou EZVIZ Software Co., Ltd. (hereinafter referred to as "EZVIZ"). This user manual (hereinafter referred to as "the Manual") cannot be reproduced, changed, translated, or distributed, partially or wholly, by any means, without the prior written permission of EZVIZ. Unless otherwise stipulated, EZVIZ does not make any warranties, guarantees or representations, express or implied, regarding to the Manual.

### **About this Manual**

The Manual includes instructions for using and managing the product. Pictures, charts, images and all other information hereinafter are for description and explanation only. The information contained in the Manual is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version in the EZVIZ™ website (<http://www.ezvizlife.com>).

### **Revision Record**

New release – January, 2019

### **Trademarks Acknowledgement**

EZVIZ™, ™, and other EZVIZ's trademarks and logos are the properties of EZVIZ in various jurisdictions. Other trademarks and logos mentioned below are the properties of their respective owners.

### **Legal Disclaimer**

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, IS PROVIDED "AS IS", WITH ALL FAULTS AND ERRORS, AND EZVIZ MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY. IN NO EVENT WILL EZVIZ, ITS DIRECTORS, OFFICERS, EMPLOYEES, OR AGENTS BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA OR DOCUMENTATION, IN CONNECTION WITH THE USE OF THIS PRODUCT, EVEN IF EZVIZ HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, IN NO EVENT SHALL EZVIZ'S TOTAL LIABILITY FOR ALL DAMAGES EXCEED THE ORIGINAL PURCHASE PRICE OF THE PRODUCT.


EZVIZ DOES NOT UNDERTAKE ANY LIABILITY FOR PERSONAL INJURY OR PROPERTY DAMAGE AS THE RESULT OF PRODUCT INTERRUPTION OR SERVICE TERMINATION CAUSED BY: A) IMPROPER INSTALLATION OR USAGE OTHER THAN AS REQUESTED; B) THE PROTECTION OF NATIONAL OR PUBLIC INTERESTS; C) FORCE MAJEURE; D) YOURSELF OR THE THIRD PARTY, INCLUDING WITHOUT LIMITATION, USING ANY THIRD PARTY'S PRODUCTS, SOFTWARE, APPLICATIONS, AND AMONG OTHERS. REGARDING TO THE PRODUCT WITH INTERNET ACCESS, THE USE OF PRODUCT SHALL BE WHOLLY AT YOUR OWN RISKS. EZVIZ SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER ATTACK, HACKER ATTACK, VIRUS INSPECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, EZVIZ WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED. SURVEILLANCE LAWS AND DATA PROTECTION LAWS VARY BY JURISDICTION. PLEASE CHECK ALL RELEVANT LAWS IN YOUR JURISDICTION BEFORE USING THIS PRODUCT IN ORDER TO ENSURE THAT YOUR USE CONFORMS TO THE APPLICABLE LAW. EZVIZ SHALL NOT BE LIABLE IN THE EVENT THAT THIS PRODUCT IS USED WITH ILLEGITIMATE PURPOSES.

IN THE EVENT OF ANY CONFLICTS BETWEEN THE ABOVE AND THE APPLICABLE LAW, THE LATTER PREVAILS.

# セットアップ

## ステップ1 電源オン

下図のように、電源ケーブルをカメラと電源アダプターに接続し、電源アダプターを電源コンセントに接続してください。

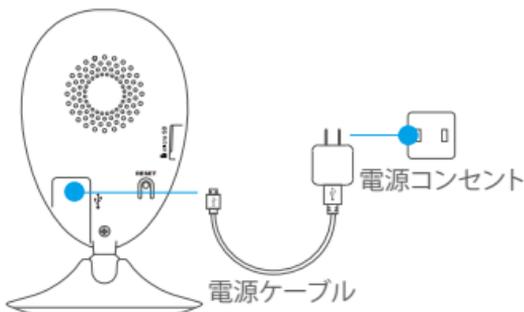

## ステップ2 カメラの設定

### 1. ユーザアカウントを作成する

- お使いのスマートフォンを 2.4GHz の Wi-Fi ネットワークに接続します。
- App Store または Google Play™ で「EZVIZ」で検索し、EZVIZ アプリをダウンロードしてインストールします。
- アプリを起動し、スタートアップウィザードにしたがって EZVIZ ユーザアカウントを登録してください。


### 2. EZVIZ にカメラを追加する

- EZVIZ アプリにログインします。
- EZVIZ アプリのホーム画面で右上隅の「+」をタップし、QR コードスキャンインターフェイスを開きます。



- カメラ底面の QR コードをスキャンします。

カメラの  
底面

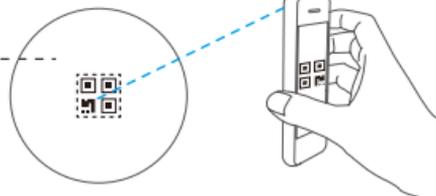


- EZVIZ アプリのウィザードにしたがって、Wi-Fi 設定を完了します。

**i** Wi-Fi 設定時は、お使いのスマートフォンがルータからの 2.4GHz Wi-Fi に接続されていることを確認してください。

### 3. デフォルトパスワードの変更 (オプション)

カメラを追加した後で、ビデオのセキュリティを確保するために、デバイスのパスワードを変更する必要があります。パスワードは画像の暗号化に使用されます。画像暗号化をオンにすると、ライブビューまたはカメラから再生する際にパスワードを入力する必要があります。

- デフォルトパスワードの変更はカメラの設定画面から行います。
- 「Change Password」(パスワードの変更) をタップします。

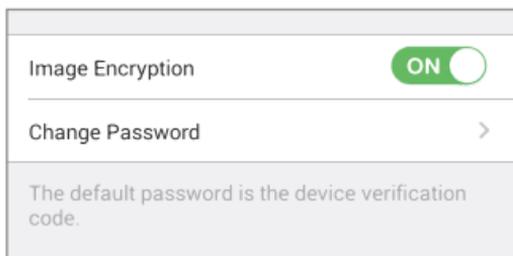

- 「Edit」(編集) をタップします。
- カメラの底面にある元の認証コードを入力します。
- 新しいパスワードを入力してください。6 ~ 12 文字の文字および数字を使用してください。

## 設置


### ステップ1 メタルプレートの取り付け (オプション)

清潔で平らな壁面を選択し、フォームステッカーまたはネジ (同梱されていません) で希望の位置に固定します。

- ① カメラには磁石が内蔵されています。金属面の場合にはこの手順をスキップすることができます。

### ステップ2 カメラの設置

磁力でカメラをメタルプレートまたは金属面に固定します (下図を参照)。

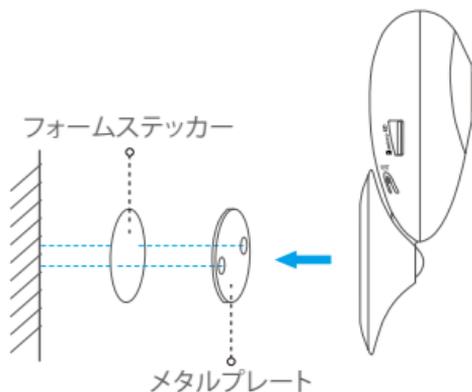


### ステップ3 設置の完了

必要に合わせてカメラの角度を調整します。

## 付録

### 基本操作

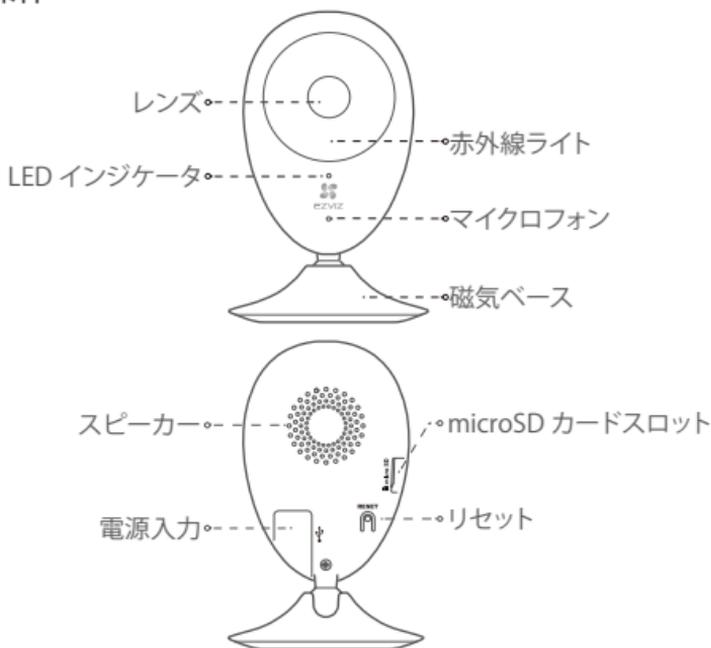

名前	説明
スピーカー	双方向通話
電源入力	== 5V ± 10%
microSD カード	microSD カード (当製品には含まれません) 用です。別途購入できます。推奨互換性: クラス 10、最大スペース 256GB。カードを挿入すると、カメラ内にイベントを録画できます。
リセット	カメラの動作中にリセット ボタンを 5 秒間長押しすると、カメラが再起動し、すべてのパラメータがデフォルトにリセットされます。

## 名前

## 説明

LED インジケータ

- ・ 赤で点灯:カメラが起動中です。
- ・ ゆっくり赤で点滅:Wi-Fi 接続が失敗しました。
- ・ 速く赤で点滅:デバイスに異常 (例: microSD カードのエラー) が発生しています。
- ・ 青で点灯: EZVIZ アプリでビデオの表示もしくは再生中です。
- ・ 速く青で点滅:カメラは Wi-Fi 接続可能状態です。
- ・ ゆっくり青で点滅:カメラは正常に動作しています。

赤外線ライト

暗い環境向けの自動光源。カメラビデオには、カラー (昼間録画用) と赤外線イルミネーターを使用した白黒 (夜間条件用) の2つのモードがあります。

## 同梱物



カメラ



USB ケーブル



電源アダプター



フォーム ステッカー




メタルプレート  
(3.5mm 穴径)



クイックスタートガイド

## メモ리카ードの取り付け

microSD カードをスロットに、カチッと音がするまで押し込みます。



## メモ리카ード初期化

1. EZVIZ アプリで「Device Settings」(デバイス設定) インターフェイスの「Storage Status」(ストレージステータス) をタップしてメモ리카ードのステータスをチェックします。

Wi-Fi Configure	TEST-WIFI  >
Storage Status	>
Device Version	Vx.x.x build xxxxxx No new version.

2. メモ리카ードのステータスが「Uninitialized」(未初期化) と表示されている場合、タップして初期化します。すると、ステータスが「Normal」(正常) に変化します。これで、カメラで、動体検知などのイベントトリガービデオの録画が開始できます。

## トラブルシューティング

- Q:** EZVIZ アプリを利用してカメラを追加すると、「The device is offline」(デバイスがオフラインです)または「The device is not registered」(デバイスが登録されていません)と表示されます。
- A:**
1. カメラが接続されているネットワークが適切に動作し、ルータの DHCP が有効になっていることを確認します。
  2. ネットワークパラメータを変更する場合は、リセット ボタンを 5 秒間長押しして、設定をリセットしてください。
- Q:** カメラがオンラインになっているときに、携帯電話がアラーム確認を受信できません。
- A:**
1. EZVIZ アプリが携帯電話で動作していることを確認してください。
  2. Android OS の携帯電話では、アプリがバックグラウンドで起動していることを確認し、iOS 携帯電話では、「Settings (設定) > Notification (通知)」でプッシュ通知機能を有効にしてください。
- Q:** カメラは、USB デバイスやポータブルバッテリーを介した電源をサポートしていますか？
- A:** 安定した電圧を供給する EZVIZ 標準電源アダプターを使用するようお勧めします。
- i** 詳細情報については [www.ezvizlife.com](http://www.ezvizlife.com) を参照してください。